



Le réseau  
de transport  
d'électricité



MINISTÈRE  
DE LA TRANSITION  
ÉNERGÉTIQUE

*Liberté  
Égalité  
Fraternité*

Document reference				Issue information	
Project	Package	Issuer	Chrono	Revision	Status
NOR_CM1	PeM	TEC	48	1.1_A	A
Title	NOR_PeM_TEC_48_Results report - Geophysical-UXO survey - AO4 OSS area_1.1_A				
Additional Metadata	Discipline	Document Type	System	Activity	
	GPH-UXO				
	Contract	Acceptance Class	Dossier	Alternative ref.	
	AO4-AO5				
	Confidentiality	Print format	Subcontractor	Contractor ref.	
	Restricted	A4			

Date	Rev	Status	Reason for Revision	Issued by	Checked by	Approved by
14/03/2022	0.0	IFR	Issued	TZ	FL	BMC
06/04/2022	0.1	B	Reviewed after client comments	TZ	FL	BMC
01/08/2022	1.0	B	Reviewed after client comments	JW	IMA	BMC
09/09/2022	1.1	B	Reviewed after client comments	JW	IMA	BMC
28/11/2022	1.1_A	A	Final document (Status A)	JW	IMA	BMC

Change log:

Document uncontrolled when printed/downloaded.  
Always check with document control for the latest revision.

**NOR\_AO4 AREA  
OFFSHORE SUBSTATION  
GEOPHYSICAL AND UXO SURVEY**

NOR\_PeM\_TEC\_48\_RESULTS  
REPORT – GEOPHYSICAL-  
UXO SURVEY – AO4 OSS  
AREA\_1.1\_A





PROJECT No.  
113401272

**RESULTS REPORT**

No. OF PAGES  
50







1.1_A	28/11/2022	Final document (Status A)	JW	IMA	BMC	FLO	BCO
1.1	09/09/2022	Review after client's comments	JW	IMA	BMC	FLO	BCO
1.0	01/08/2022	Review after client's comments	JW	IMA	BMC	FLO	BCO
0.1	06/04/2022	Reviewed after client comments	TZ	FL	BMC	FLO	BCO
0.0	14/03/2022	Issued	TZ	FL	BMC	FLO	BCO
REV	DATE	DESCRIPTION	BY	CHK	ENG	PM	CLIENT

   	Project	Package	Issuer	Chrono	Revision	Status
	NOR_CM1	GPH - UXO	TEC	48	1.1_A	A
	Title	NOR_PeM_TEC_48_Results report - Geophysical-UXO survey - AO4 OSS area_1.1_A				

## CONTENTS

1.	INTRODUCTION.....	7
1.1.	PROJECT OVERVIEW.....	7
1.2.	SCOPE OF WORKS.....	11
1.3.	GEODETIC PARAMETERS .....	11
1.3.1.	Survey datum.....	11
1.3.2.	Vertical datum .....	12
1.3.3.	Tidal reduction .....	12
2.	GEOPHYSICAL DATASET .....	14
2.1.	QA/QC CHECK .....	14
2.2.	SIT SURVEY .....	14
3.	DATA ACQUISITION.....	17
3.1.	SURVEY ACQUISITION SCHEME.....	17
3.2.	MULTIBEAM ECHOSOUNDER.....	18
3.3.	SIDE SCAN SONAR – UXO SURVEY.....	22
3.4.	GRADIOMETER – UXO SURVEY.....	27
4.	RESULTS.....	33
4.1.	COVERAGE AREA.....	33
4.2.	ANOMALY PICKING .....	33
4.2.1.	Magnetic anomalies .....	33
4.2.2.	MBES and side scan sonar contacts.....	34
4.3.	DISCRIMINATION OF pUXO TARGETS.....	34
5.	AVOIDANCE DISTANCES .....	35
6.	CONCLUSION .....	38

<b>Confidentiality</b>	<i>Diffusion restreinte (restricted)</i>	<b>Pages</b>	<i>Page 1 of 48</i>
<b>Issue date</b>	28/11/2022	Document uncontrolled when printed/downloaded	

   	Project	Package	Issuer	Chrono	Revision	Status
	NOR_CM1	GPH - UXO	TEC	48	1.1_A	A
	Title	NOR_PeM_TEC_48_Results report - Geophysical-UXO survey - AO4 OSS area_1.1_A				

REFERENCES.....	39
APPENDIX I – LIST OF THE MAGNETIC ANOMALIES DETECTED.....	41
APPENDIX II – LIST OF THE SIDE SCAN CONTACTS DETECTED .....	43
APPENDIX III – LIST OF THE MBES CONTACTS DETECTED .....	45
APPENDIX IV – ALARP CERTIFICATE MAP .....	47

## LIST OF FIGURES

Figure 1-1: NOR_AO4 Survey area.....	8
Figure 1-2: Windfarm area (OWF), Offshore Substation (OSS) and Export cable (EC) in the NOR_AO4 survey area.....	8
Figure 1-3: UXO box location at the NOR_AO4 Offshore substation (OSS). ....	9
Figure 1-4: UXO box dimensions at the NOR_AO4 Offshore substation (OSS).....	10
Figure 1-5: UXO box survey line plan at the NOR_AO4 Offshore substation (OSS).10	
Figure 1-6: Qinsy's method for accurate height calculation.....	13
Figure 2-1: Result from the SIT, Residual field, and Analytic signal at 3m and 6 m altitude. ....	15
Figure 3-1: UXO data acquisition scheme. ....	18
Figure 3-2: MBES bathymetry data acquisition with the Qinsy software. ....	20
Figure 3-3: Processing screen of MBES bathymetry data with the Qimera software.21	
Figure 3-4: 3D image of the MBES bathymetry processing. ....	21
Figure 3-5: Example of the bathymetric data for NOR_AO4 OSS.....	22
Figure 3-6: Navigation editor in SonarWiz 7. ....	24
Figure 3-7: Bottom tracking processing drawn in blue in the SonarWiz software. ....	25
Figure 3-8: Example of the side scan sonar data for NOR_AO4 OSS. ....	26
Figure 3-9: ROTV with the fixed frame system for MAG acquisition.....	27
Figure 3-10: Processing workflow of magnetometer data. ....	29
Figure 3-11: Example of the maps of the residual field and the analytic signal for NOR_AO4 OSS. ....	30
Figure 3-12: Dynamic coverage calculations. ....	32

<b>Confidentiality</b>	<i>Diffusion restreinte (restricted)</i>	<b>Pages</b>	<i>Page 2 of 48</i>
<b>Issue date</b>	28/11/2022	Document uncontrolled when printed/downloaded	





   	Project	Package	Issuer	Chrono	Revision	Status
	NOR_CM1	GPH - UXO	TEC	48	1.1_A	A
	Title	NOR_PeM_TEC_48_Results report - Geophysical-UXO survey - AO4 OSS area_1.1_A				

Figure 4-1: Colour scale and threshold used for analysis of magnetic anomalies. ...	33
Figure 5-1: Avoidance distances. ....	35
Figure 5-2: Case where the GI boxes location is not impacted or little impacted by avoidance areas: an ALARP zone is defined (in green).....	37
Figure 5-3: Case where the GI boxes location is largely or completely impacted by avoidance areas and no ALARP zone can be defined.....	37
Figure 5-4: Legend of the ALARP maps. ....	38





## LIST OF TABLES

Table 1: Datum parameters table .....	11
Table 2: Projection parameters table.....	12
Table 3: Position verification of 10 Kg item.....	15
Table 4: Position verification of 72 Kg item.....	16
Table 5: UXO data acquisition scheme information .....	17
Table 6: Magnetometer coverage area (centroid of the GI box).....	33
Table 7: Final ALARP workable areas and GI box location.....	38

## ABBREVIATIONS

<b>AAA</b>	Anti-Aircraft Artillery
<b>ADCP</b>	Acoustic Doppler Current Profiler
<b>ALARP</b>	As Low as Reasonable Practicable
<b>cm</b>	Centimetre
<b>CoG</b>	Center of Gravity
<b>DGEC</b>	Direction générale de l'énergie et du climat
<b>DP</b>	Dynamic Positioning
<b>DTM</b>	Digital Terrain Model
<b>EC</b>	Export Cable
<b>EGN</b>	Empirical Gain Normalization
<b>FLO</b>	Fisheries Liaison Officer
<b>GEO</b>	Geophysicist





<b>Confidentiality</b>	<i>Diffusion restreinte (restricted)</i>	<b>Pages</b>	<i>Page 3 of 48</i>
<b>Issue date</b>	28/11/2022	Document uncontrolled when printed/downloaded	

   	Project	Package	Issuer	Chrono	Revision	Status
	NOR_CM1	GPH - UXO	TEC	48	1.1_A	A
	Title	NOR_PeM_TEC_48_Results report - Geophysical-UXO survey - AO4 OSS area_1.1_A				

## ABBREVIATIONS

<b>GI</b>	Borehole location
<b>GIS</b>	Geographic Information System
<b>GNSS</b>	Global Navigation Satellite System
<b>GPS</b>	Global Positioning System
<b>GRS</b>	Geodetic Reference System
<b>h</b>	Hour
<b>IGRF</b>	International Geomagnetic Reference Field
<b>INERIS</b>	L'Institut national de l'environnement industriel et des risques
<b>INS</b>	Inertial Navigation System
<b>JSF</b>	EdgeTech Sonar data file format
<b>Kg</b>	Kilogram
<b>KHz</b>	kilohertz
<b>LAT</b>	Low Astronomical Tide
<b>LMA</b>	Luftmine A
<b>LMB</b>	Luftmine B
<b>LSA</b>	Land Service Ammunition
<b>m</b>	Meters
<b>M</b>	Minutes
<b>MAG</b>	Magnetometer
<b>MBES</b>	Multibeam echosounder
<b>mm</b>	Millimetre
<b>MMO</b>	Marine Mammals Observation
<b>MOB</b>	Mobilisation
<b>MRU</b>	Motion Reference Unit
<b>nT</b>	nanoTesla
<b>OSS</b>	Offshore substation
<b>OWF</b>	Offshore windfarm
<b>PC</b>	Party Chief





<b>Confidentiality</b>	<i>Diffusion restreinte (restricted)</i>	<b>Pages</b>	<i>Page 4 of 48</i>
<b>Issue date</b>	28/11/2022	Document uncontrolled when printed/downloaded	

   	Project	Package	Issuer	Chrono	Revision	Status
	NOR_CM1	GPH - UXO	TEC	48	1.1_A	A
	Title	NOR_PeM_TEC_48_Results report - Geophysical-UXO survey - AO4 OSS area_1.1_A				

## ABBREVIATIONS

PEP	Project Execution Plan
POB	Personnel On Board
PPP	Precise Point Positioning
PPS	Pulse Per Second
PPSU	Pulse Power Supply Unit
pUXO	Possible unexploded ordnance
QA	Quality Assurance
QC	Quality Control
QGIS	Quantum GIS (Software)
QHSE	Quality, Health, Safety and Environment
RGB	Red, green, blue
ROTV	Remotely operated towed vehicle
ROV	Remotely Operated Vehicle
RTE	Réseau de Transport d'Electricité
RTK	Real Time Kinematics
s	Second
SHOM	Service hydrographique et océanographique de la Marine
SIT	Surrogate Item Trials
SRF	Ship's Reference Frame
SSS	Side Scan Sonar
SVP	Sound Velocity Profiler
SVS	Sound Velocity Sensor
TBC	To be confirmed
TXT	Standard text document file format
UHR	Ultra-High Resolution
USBL	Ultra-Short Base Line
UTC	Universal Time Coordinated or Coordinated Universal Time
UTM	Universal Transverse Mercator

Confidentiality	Diffusion restreinte (restricted)	Pages	Page 5 of 48
Issue date	28/11/2022	Document uncontrolled when printed/downloaded	


   	Project	Package	Issuer	Chrono	Revision	Status
	NOR_CM1	GPH - UXO	TEC	48	1.1_A	A
	Title	NOR_PeM_TEC_48_Results report - Geophysical-UXO survey - AO4 OSS area_1.1_A				

## ABBREVIATIONS

<b>UXO</b>	Unexploded ordnance
<b>VRF</b>	Vertical Reference Frame
<b>VSAT</b>	Very Small Aperture Terminal
<b>WGS84</b>	World Geodetic System 1984
<b>WT</b>	Work time

<b>Confidentiality</b>	Diffusion restreinte (restricted)	<b>Pages</b>	Page 6 of 48
<b>Issue date</b>	28/11/2022	Document uncontrolled when printed/downloaded	



	Project	Package	Issuer	Chrono	Revision	Status
	NOR_CM1	GPH - UXO	TEC	48	1.1_A	A
	Title	NOR_PeM_TEC_48_Results report - Geophysical-UXO survey - AO4 OSS area_1.1_A				

## 1. INTRODUCTION

### 1.1. PROJECT OVERVIEW


Tecnoambiente carried out a geophysical survey over the proposed NOR\_AO4 lot, located in the English Channel (Figure 1-1 and 1-2), more precisely off the coast of Normandy, in the Bay of Seine. The site is under consideration for a windfarm and offshore substation. The survey of the UXO box was carried out over the previously acquired seismic lines in Phase I, in 2021.


The dimensions of this area of interest are 130 m x 130 m and according to the SHOM bathymetry, the site is located in water depths ranging from -41 to -45.00 m. The spatial surface this area represents is about 4.25 km<sup>2</sup>.

This is an area with a strong military history. During World War II, it is where the main Allied landings in France took place, so it is considered an area with a strong presence of potential UXO.


The objective of this report is to present the data obtained in the geophysical/UXO phase of the NOR\_AO4 work area, focusing only on the Offshore Substation area (OSS). Figure 1-3 show the location of this box.

<b>Confidentiality</b>	<i>Diffusion restreinte (restricted)</i>	<b>Pages</b>	<i>Page 7 of 48</i>
<b>Issue date</b>	28/11/2022	Document uncontrolled when printed/downloaded	

	Project	Package	Issuer	Chrono	Revision	Status
	NOR_CM1	GPH - UXO	TEC	48	1.1_A	A
	Title	NOR_PeM_TEC_48_Results report - Geophysical-UXO survey - AO4 OSS area_1.1_A				

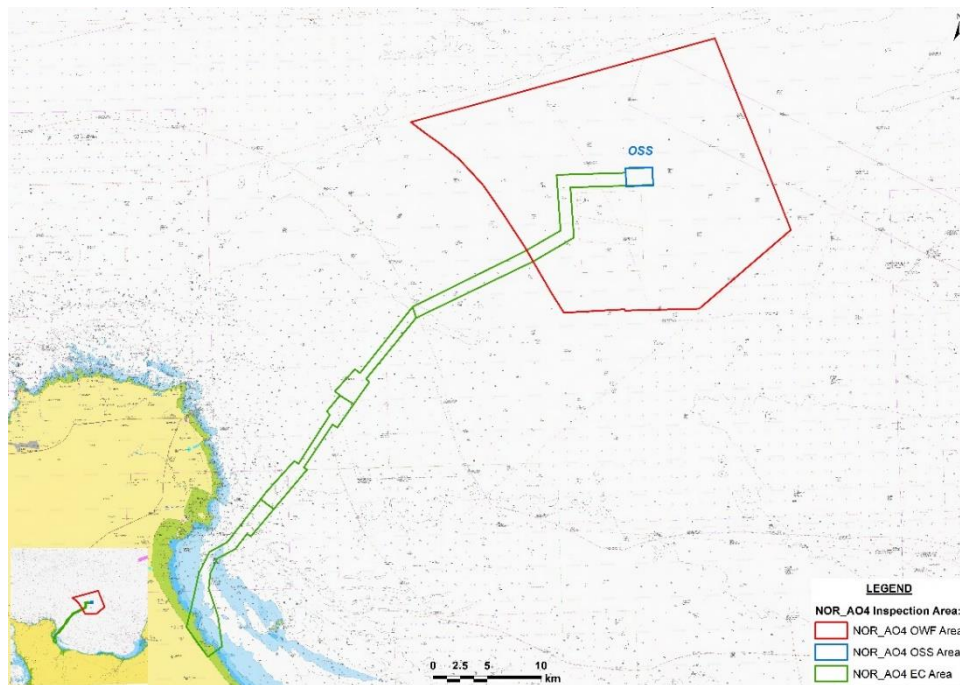



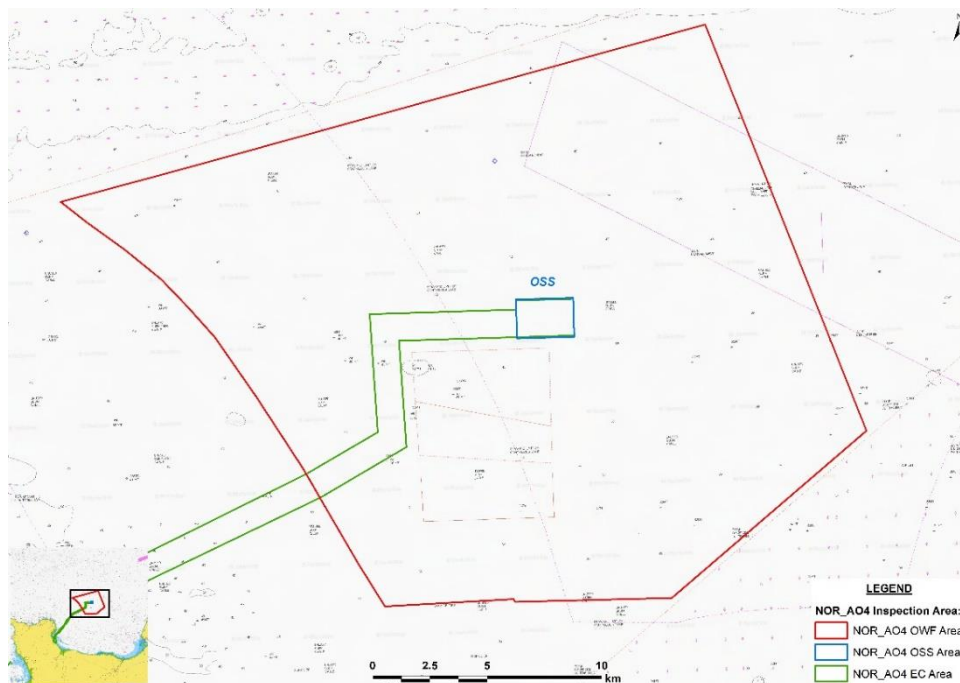


**Figure 1-1:** NOR\_AO4 Survey area.



**Figure 1-2:** Windfarm area (OWF), Offshore Substation (OSS) and Export cable (EC) in the NOR\_AO4 survey area.

<b>Confidentiality</b>	<i>Diffusion restreinte (restricted)</i>	<b>Pages</b>	<i>Page 8 of 48</i>
<b>Issue date</b>	28/11/2022	Document uncontrolled when printed/downloaded	

   	Project	Package	Issuer	Chrono	Revision	Status
	NOR_CM1	GPH - UXO	TEC	48	1.1_A	A
	Title	NOR_PeM_TEC_48_Results report - Geophysical-UXO survey - AO4 OSS area_1.1_A				

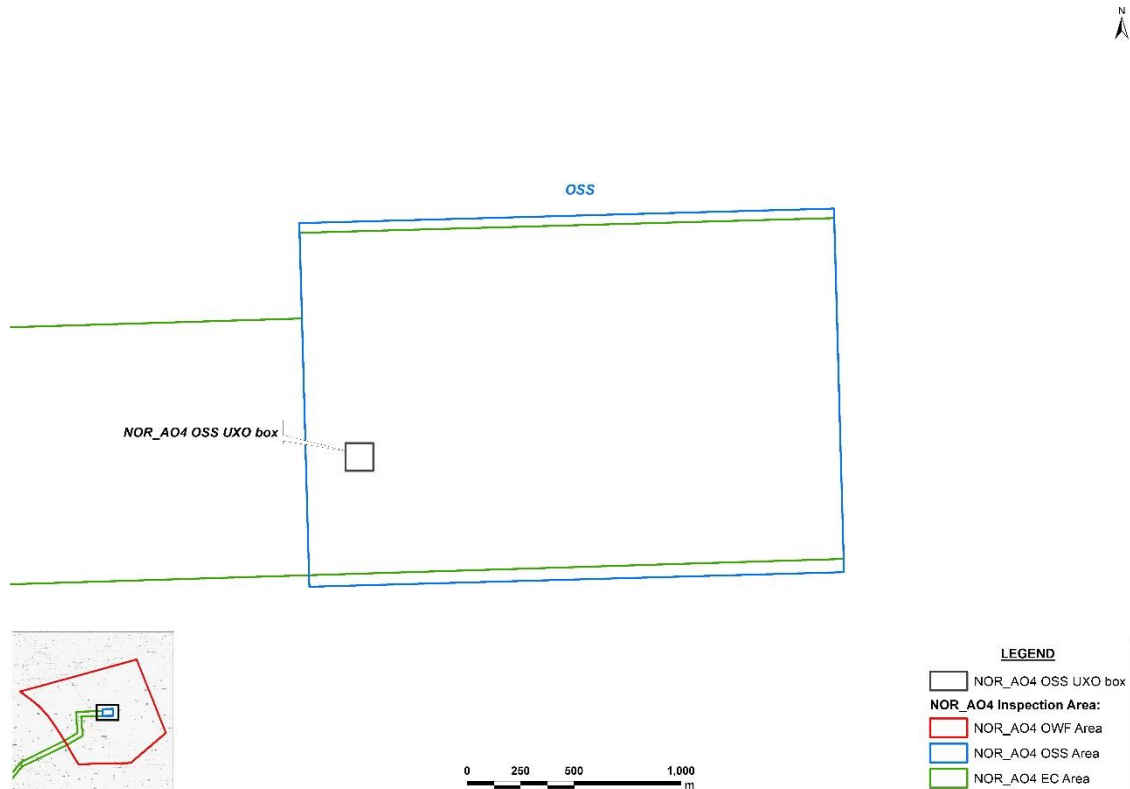


**Figure 1-3:** UXO box location at the NOR\_AO4 Offshore substation (OSS).


The UXO box size comprises an area of 130 m x 130 m, with a run in / run out area of 1000 metres utilised to optimise the acquisition of the magnetometer data. Figure 1-4 indicates the UXO box dimensions. Figure 1-5 illustrates the survey line plan layout at 6m separation.

The NOR\_AO4 OSS UXO box central point coordinates (*WGS84 Zone 30N*) are as follows:


- **UTM X:** 666543.45
- **UTM Y:** 5525472.59

<b>Confidentiality</b>	<i>Diffusion restreinte (restricted)</i>	<b>Pages</b>	<i>Page 9 of 48</i>
<b>Issue date</b>	28/11/2022	Document uncontrolled when printed/downloaded	

	Project	Package	Issuer	Chrono	Revision	Status
	NOR_CM1	GPH - UXO	TEC	48	1.1_A	A
	Title	NOR_PeM_TEC_48_Results report - Geophysical-UXO survey - AO4 OSS area_1.1_A				

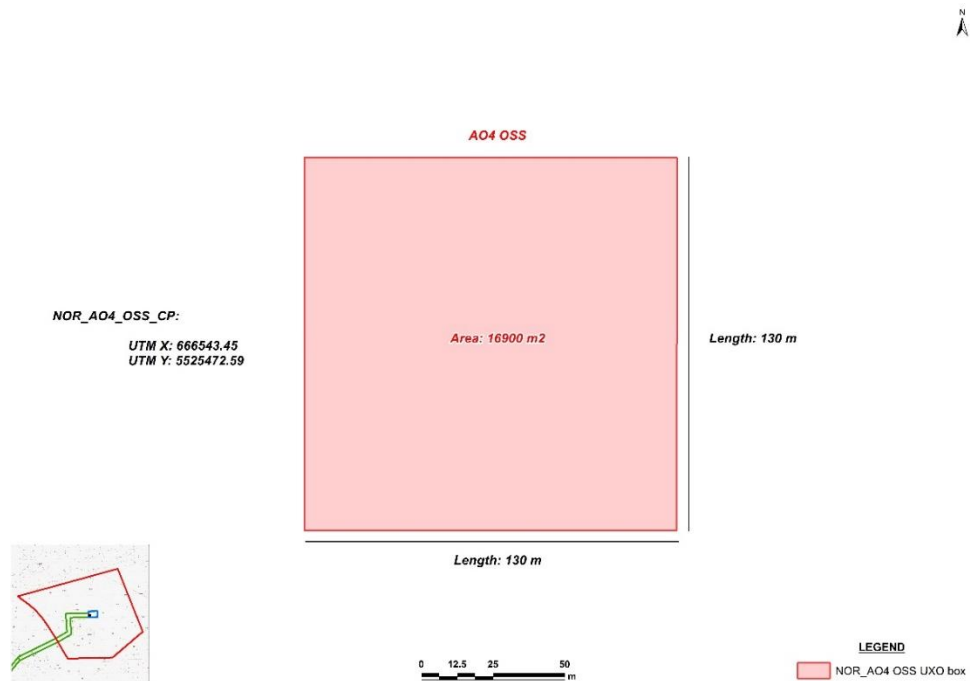



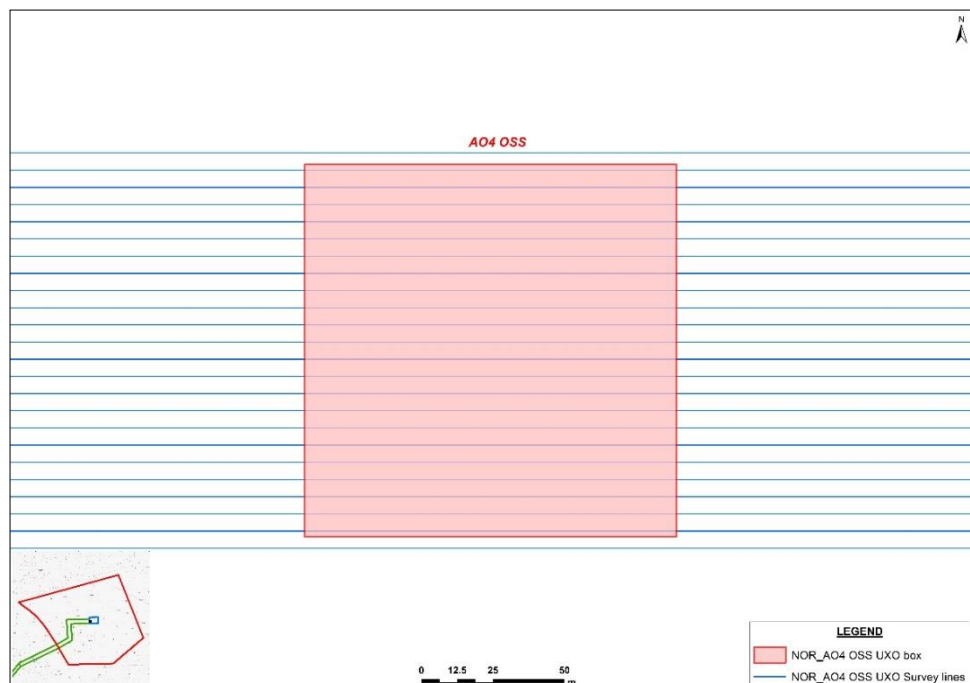

**Figure 1-4:** UXO box dimensions at the NOR\_AO4 Offshore substation (OSS).



**Figure 1-5:** UXO box survey line plan at the NOR\_AO4 Offshore substation (OSS).

<b>Confidentiality</b>	<i>Diffusion restreinte (restricted)</i>	<b>Pages</b>	<i>Page 10 of 48</i>
<b>Issue date</b>	28/11/2022	Document uncontrolled when printed/downloaded	

   	Project	Package	Issuer	Chrono	Revision	Status
	NOR_CM1	GPH - UXO	TEC	48	1.1_A	A
	Title	NOR_PeM_TEC_48_Results report - Geophysical-UXO survey - AO4 OSS area_1.1_A				

## 1.2. SCOPE OF WORKS

The objective of the site survey was to perform a geophysical and UXO survey over the proposed 6 GI points (Borehole locations) on the OSS site, comprising MBES, SSS and MAG datasets. The purpose of this was to:

- To define the final location of the GI points on the proposed box
- To detect magnetometer anomalies, and side scan and MBES contacts
- To review proposed borehole locations for geohazards

The main purpose of the study was to provide an ALARP certificate for intrusive geotechnical sampling over the NOR\_AO4 OSS area.

## 1.3. GEODETIC PARAMETERS





### 1.3.1. Survey datum

These parameters are detailed below.

**Table 1:** Datum parameters table

DATUM	
Survey Datum:	WGS 84
Spheroid	GRS 1980
Semi-Major Axis (a)	6,378,137.000
Semi-Minor Axis (b)	6,356,752.31424
Inverse Flattening (1/f)	1/298.257223563

<b>Confidentiality</b>	<i>Diffusion restreinte (restricted)</i>	<b>Pages</b>	<i>Page 11 of 48</i>
<b>Issue date</b>	28/11/2022	Document uncontrolled when printed/downloaded	

   	Project	Package	Issuer	Chrono	Revision	Status
	NOR_CM1	GPH - UXO	TEC	48	1.1_A	A
	Title	NOR_PeM_TEC_48_Results report - Geophysical-UXO survey - AO4 OSS area_1.1_A				

**Table 2:** Projection parameters table.

PROJECTION	
Projection	UTM
False Easting	500000
False Northing	0
Latitude of Origin	0°00'00.000000"
Central Meridian	3°00'00.000000"
UTM Zone	30 N
Scale Factor on CM	0.9996
Units:	Meters


### 1.3.2. Vertical datum


Vertical datum used by the Qinsy software is LAT Bathyelli v2 geoid published by the SHOM in December 2013. The Bathyelli LAT (SHOM 2013) is a surface based on the GRS 1980 spheroid. The same geoid model was used for the AO4 survey in 2021.

### 1.3.3. Tidal reduction

To carry out the survey as accurately as possible, Tecnoambiente utilised MarineStar PPP corrections via satellite signal. When using an accurate GNSS system (RTK correction), the tidal corrections are carried out in real-time through Qinsy computations, as shown in Figure 1-6.

<b>Confidentiality</b>	<i>Diffusion restreinte (restricted)</i>	<b>Pages</b>	<i>Page 12 of 48</i>
<b>Issue date</b>	28/11/2022	Document uncontrolled when printed/downloaded	



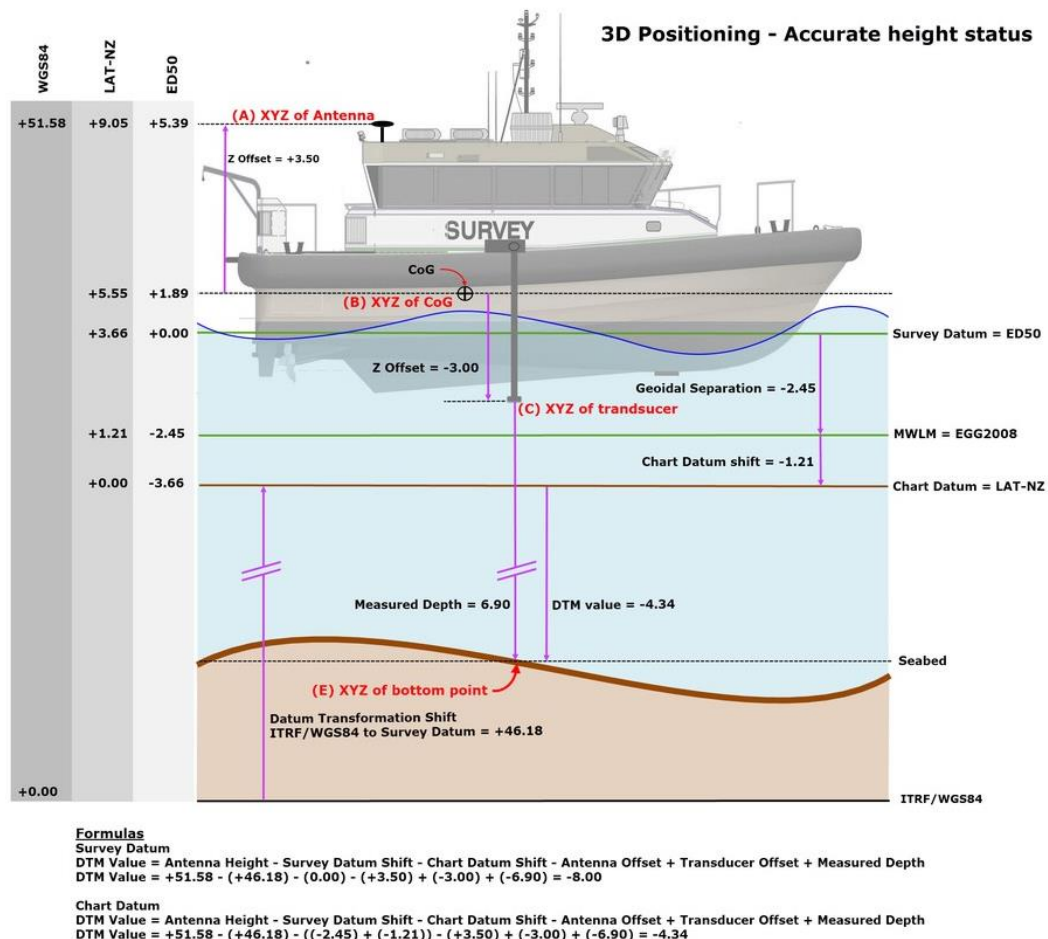

	Project	Package	Issuer	Chrono	Revision	Status
	NOR_CM1	GPH - UXO	TEC	48	1.1_A	A
	Title	NOR_PeM_TEC_48_Results report - Geophysical-UXO survey - AO4 OSS area_1.1_A				



**Figure 1-6:** Qinsy's method for accurate height calculation.

The separation between WGS84 ellipsoid (GRS80) and the vertical datum is a model called Bathyelli v2, it is a set of surfaces, each of which defines the separation of one vertical datum from the WGS84 ellipsoid. If corrections drop out, they can be applied in post processing.

<b>Confidentiality</b>	Diffusion restreinte (restricted)	<b>Pages</b>	Page 13 of 48
<b>Issue date</b>	28/11/2022	Document uncontrolled when printed/downloaded	

   	Project	Package	Issuer	Chrono	Revision	Status
	NOR_CM1	GPH - UXO	TEC	48	1.1_A	A
	Title	NOR_PeM_TEC_48_Results report - Geophysical-UXO survey - AO4 OSS area_1.1_A				

## 2. GEOPHYSICAL DATASET

### 2.1. QA/QC CHECK

The processed values obtained from the onboard processing team during the survey were checked before the ALARP certificate phase. This quality control check of the input data validates the quality of the processing method. Here is the QA/QC for the measurements made:

- QC0: check of the geophysical value
- QC1: Check of the sensor position
- QC2: Check of the altitude of sensor and dynamic coverage
- QC3: Check of the noise
- QC4: Check of the speed and sampling frequency

### 2.2. SIT SURVEY

The calibration test (SIT) was carried out with a surrogate of iron weight 10 and 72 kg in order to be consistent with the historical data (Ref 01) considering the lowest magnetic signal to detect, and the highest ammunition size such as German airplanes deployed magnetic mines LMA (Luftmine A) and LMB (Luftmine B). This test makes it possible to estimate the precision of the survey positioning, the amplitude of the signal to be sought and the detectability distance.


After mapping a white area, clear of potential targets, the surrogates were immersed. Several altitudes were used to perform the test above the surrogate: 3 m, 5 m, and 6 m (Figure 2-1). On the 5 and 6 m altitude map, the surrogate of 10 kg is no longer detectable (Ref 05). However, the amplitude of the signal at 3 m altitude for this 10kg weight is about 13nT.

From these SIT data we were able to estimate:


- The uncertainty of the survey at 2.42 m. average (Tables 3 and 4)
- A detection range of 6 m for a ferrous mass greater than 10 kg

<b>Confidentiality</b>	<i>Diffusion restreinte (restricted)</i>	<b>Pages</b>	<i>Page 14 of 48</i>
<b>Issue date</b>	28/11/2022	Document uncontrolled when printed/downloaded	



	Project	Package	Issuer	Chrono	Revision	Status
	NOR_CM1	GPH - UXO	TEC	48	1.1_A	A
	Title	NOR_PeM_TEC_48_Results report - Geophysical-UXO survey - A04 OSS area_1.1_A				

- A detection range of 4 m for a ferrous mass of about 10 kg which could correspond to LMA/LMB munitions.

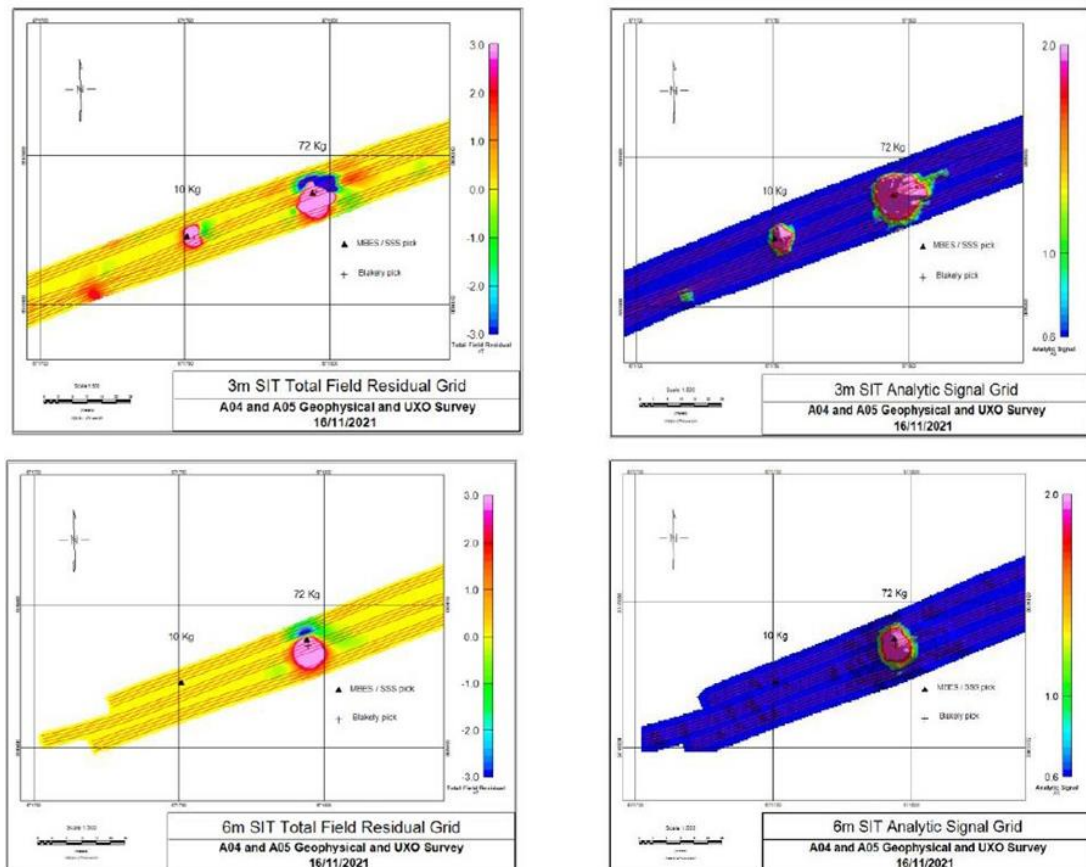





**Figure 2-1:** Result from the SIT, Residual field, and Analytic signal at 3m and 6 m altitude.

**Table 3:** Position verification of 10 Kg item.

	Source	Easting (m)	Northing (m)	Δ Easting (m)	Δ Northing (m)	Total Deviation(m)
<b>10 Kg Surrogate Item</b>	SSS position	671750.8	5515622.7	N/A	N/A	N/A
	Blakely test @3m	671753.0	5515622.5	2.3	-0.2	2.3
	Blakely test @5m	N/A	N/A	N/A	N/A	N/A
	Blakely test @6m	N/A	N/A	N/A	N/A	N

<b>Confidentiality</b>	Diffusion restreinte (restricted)	<b>Pages</b>	Page 15 of 48
<b>Issue date</b>	28/11/2022	Document uncontrolled when printed/downloaded	





   	Project	Package	Issuer	Chrono	Revision	Status
	NOR_CM1	GPH - UXO	TEC	48	1.1_A	A
	Title	NOR_PeM_TEC_48_Results report - Geophysical-UXO survey - AO4 OSS area_1.1_A				

**Table 4:** Position verification of 72 Kg item.

72 Kg Surrogate Item	Source	Easting (m)	Northing (m)	Δ Easting (m)	Δ Northing (m)	Total Deviation(m)
	MBES position	671794.0	5515638.4	N/A	N/A	N/A
	Blakely test @ 3m	671795.5	5515638.0	1.5	-0.4	1.5
	Blakely test @ 5m	671795.0	5515635.5	1.0	-2.9	3.0
	Blakely test @ 6m	671794.5	5515635.5	0.5	-2.9	2.9

Thanks to the SIT trial performed before the data acquisition, it was possible to detect LMA/LMB mines that were laying on the seabed. Depth of burial data for locating buried LMA/LMB mines was found to be inaccurate and was discarded. The very low probability of finding this type of buried target is described in the ALARP certificates.

<b>Confidentiality</b>	Diffusion restreinte (restricted)	<b>Pages</b>	Page 16 of 48
<b>Issue date</b>	28/11/2022	Document uncontrolled when printed/downloaded	

   	Project	Package	Issuer	Chrono	Revision	Status
	NOR_CM1	GPH - UXO	TEC	48	1.1_A	A
	Title	NOR_PeM_TEC_48_Results report - Geophysical-UXO survey - AO4 OSS area_1.1_A				

### 3. DATA ACQUISITION

#### 3.1. SURVEY ACQUISITION SCHEME


To ensure full coverage of the UXO box within the AO4 offshore substation area, data acquisition during the survey was carried out as follows:


**Table 5:** UXO data acquisition scheme information

Methodology	Survey lines	Range
Multibeam echosounder system (MBES)	6 m	75 m
Side Scan Sonar (SSS)		100 m
Gradiometer (MAG)		8 m

The following figure shows the basic data acquisition scheme for the UXO phase.

<b>Confidentiality</b>	<i>Diffusion restreinte (restricted)</i>	<b>Pages</b>	<i>Page 17 of 48</i>
<b>Issue date</b>	28/11/2022	Document uncontrolled when printed/downloaded	

	Project	Package	Issuer	Chrono	Revision	Status
	NOR_CM1	GPH - UXO	TEC	48	1.1_A	A
	Title	NOR_PeM_TEC_48_Results report - Geophysical-UXO survey - AO4 OSS area_1.1_A				

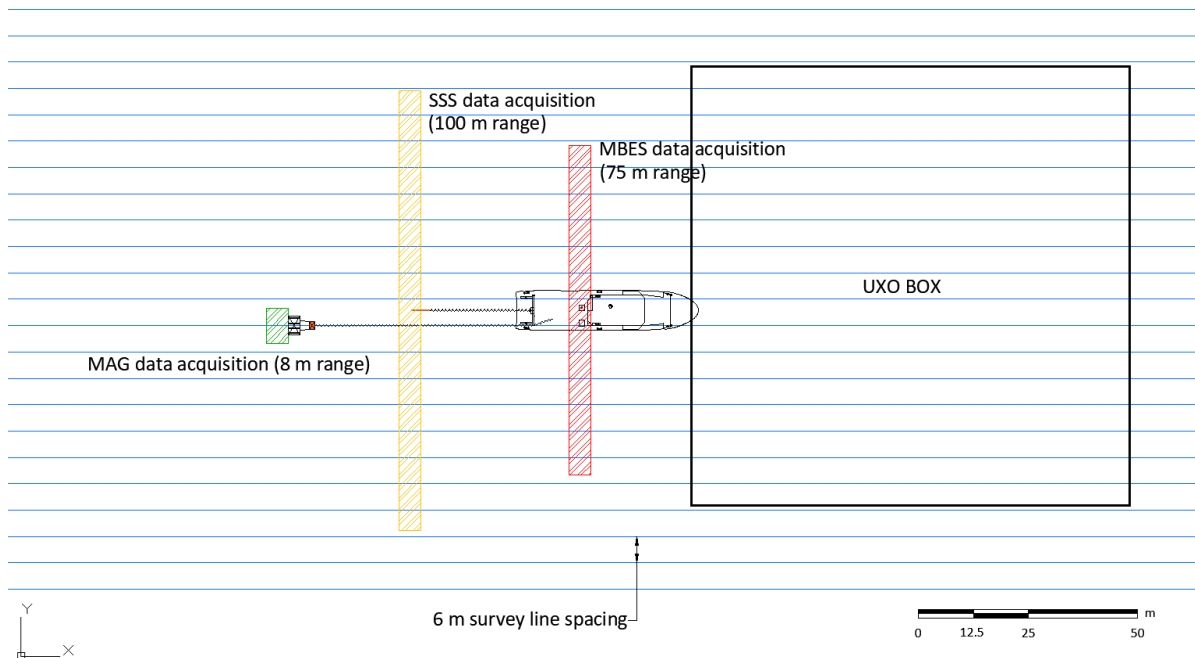

**Figure 3-1:** UXO data acquisition scheme.


The data acquisition of the three methodologies is performed not only in the target area, but the acquisition is extended to adjacent areas. This is done for two main reasons: on one hand, the line plan covers a larger area as a run-in/run-out zone to stabilize the sensors on the seabed; and on the other hand, to cover a larger area than the target area and thus obtain more data in case the UXO box has to be moved to a quieter area if necessary.

### 3.2. MULTIBEAM ECHOSOUNDER

The objective of this phase of data acquisition is the detection of possible MBES targets lying on the seabed. Due to the coverage requirements of gradiometer data acquisition, this required total coverage of the seabed within the OSS UXO box, and hence a survey line spacing of 6 metres was utilised.

During data acquisition, the vessel's master must follow previously programmed routes along the project lines, shown on the computer screen (Helmsmann indicator). If the actual course deviates from the programmed route by more than a specified amount, or when there

<b>Confidentiality</b>	<i>Diffusion restreinte (restricted)</i>	<b>Pages</b>	<i>Page 18 of 48</i>
<b>Issue date</b>	28/11/2022	Document uncontrolled when printed/downloaded	

	Project	Package	Issuer	Chrono	Revision	Status
	NOR_CM1	GPH - UXO	TEC	48	1.1_A	A
	Title	NOR_PeM_TEC_48_Results report - Geophysical-UXO survey - AO4 OSS area_1.1_A				

is a problem with a peripheral, such as a loss of GPS corrections, the vessel master is warned by the use of visual and audible alarms.


While the master follows the navigation lines, the acquisition module of the hydrography program captures all of the position data sent by the GPS, the raw values of the movement reference unit (Hydrins III) and the heading of the equipment; to correct the location of the soundings sent by the multibeam echosounder. This correction is made for each transmission pulse in real-time.


Parallel to data entry, data acquired by the equipment and peripherals are synchronized. This process is carried out by Qinsy and is complemented by the input of the time and the pulse per second (PPS) provided by the MRU, so that all data is time synchronised.

The guidelines followed by Tecnoambiente during the surveying for MBES data acquisition are as follows:

- IT-CM-36 SVP Deployment Recovery, Rev1.0
- IT-CM-01. Guidelines for Hydrography Project management, 5
- IT-CM-04. Bathymetric survey, 1
- IT-CM-14 Survey Basics Guidance, 1
- IT-CM-15 Online Surveying procedure, 3

<b>Confidentiality</b>	<i>Diffusion restreinte (restricted)</i>	<b>Pages</b>	<i>Page 19 of 48</i>
<b>Issue date</b>	28/11/2022	Document uncontrolled when printed/downloaded	

	Project	Package	Issuer	Chrono	Revision	Status
	NOR_CM1	GPH - UXO	TEC	48	1.1_A	A
	Title	NOR_PeM_TEC_48_Results report - Geophysical-UXO survey - AO4 OSS area_1.1_A				

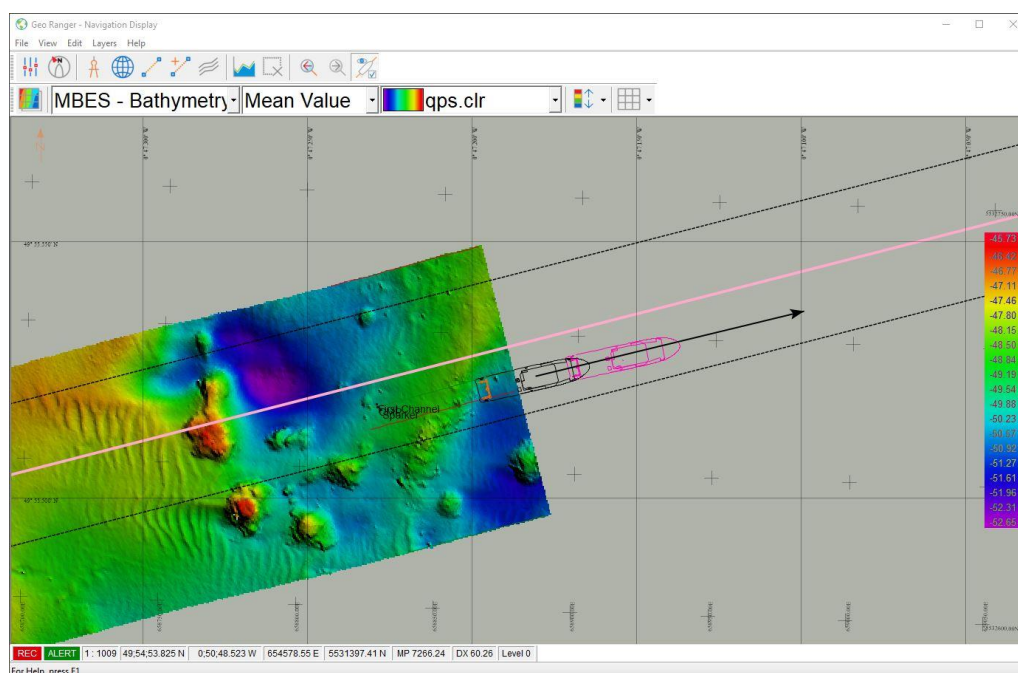


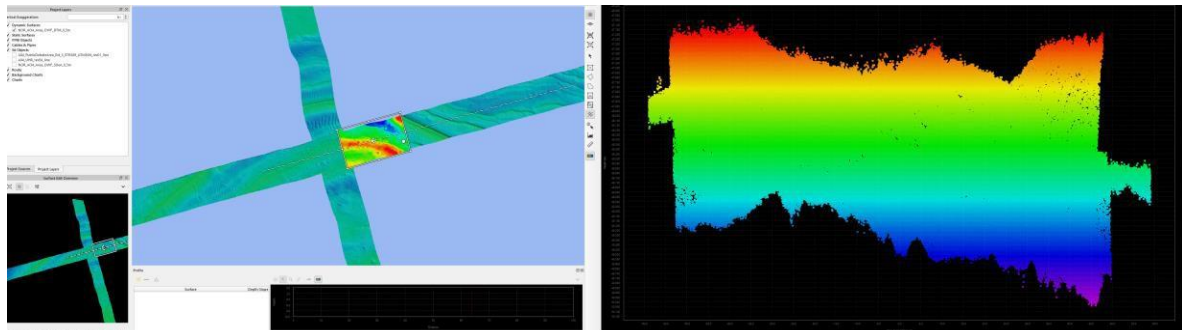
**Figure 3-2:** MBES bathymetry data acquisition with the Qinsy software.

During data acquisition, limits were applied to reduce soundings noise. These limits in the recording correspond to static gates of the equipment software that reduce the acquired registers noise, in accordance with statistical calculations of vertical uncertainty.


During the processing phase of acquired data, the lines on the screen are processed, in order to manually correct any noise that appears in the records. Noise is produced by multiple factors such as, multipath in position, air bubbles, cetaceans, motor interference from the vessel, etc., in the digital register of soundings. To make certain of the complete removal of any noise in the soundings, spike filters and spline filters were applied.

<b>Confidentiality</b>	Diffusion restreinte (restricted)		<b>Pages</b>	Page 20 of 48
<b>Issue date</b>	28/11/2022	Document uncontrolled when printed/downloaded		

	Project	Package	Issuer	Chrono	Revision	Status
	NOR_CM1	GPH - UXO	TEC	48	1.1_A	A
	Title	NOR_PeM_TEC_48_Results report - Geophysical-UXO survey - AO4 OSS area_1.1_A				



**Figure 3-3:** Processing screen of MBES bathymetry data with the Qimera software.

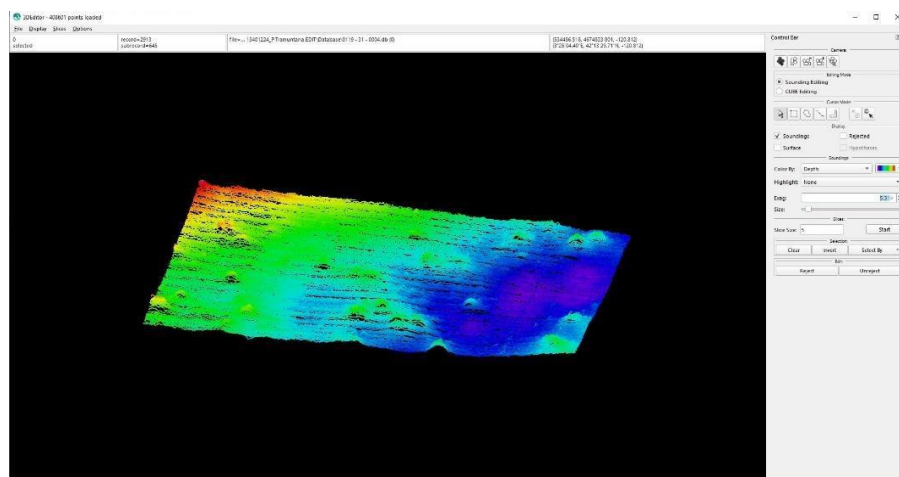


**Figure 3-4:** 3D image of the MBES bathymetry processing.


Once any possible existing errors in the records were deleted, a digital model of the terrain with 0.1 x 0.1 m grid size was produced, with a minimum cell size to obtain the maximum resolution of the seabed.

Digital terrain models (DTM) are created in Qimera. Once done, the DTM's are exported as 32bits RGB Geotiff, for each of the UXO boxes.

<b>Confidentiality</b>	<i>Diffusion restreinte (restricted)</i>	<b>Pages</b>	<i>Page 21 of 48</i>
<b>Issue date</b>	28/11/2022	Document uncontrolled when printed/downloaded	



	Project	Package	Issuer	Chrono	Revision	Status
	NOR_CM1	GPH - UXO	TEC	48	1.1_A	A
	Title	NOR_PeM_TEC_48_Results report - Geophysical-UXO survey - AO4 OSS area_1.1_A				

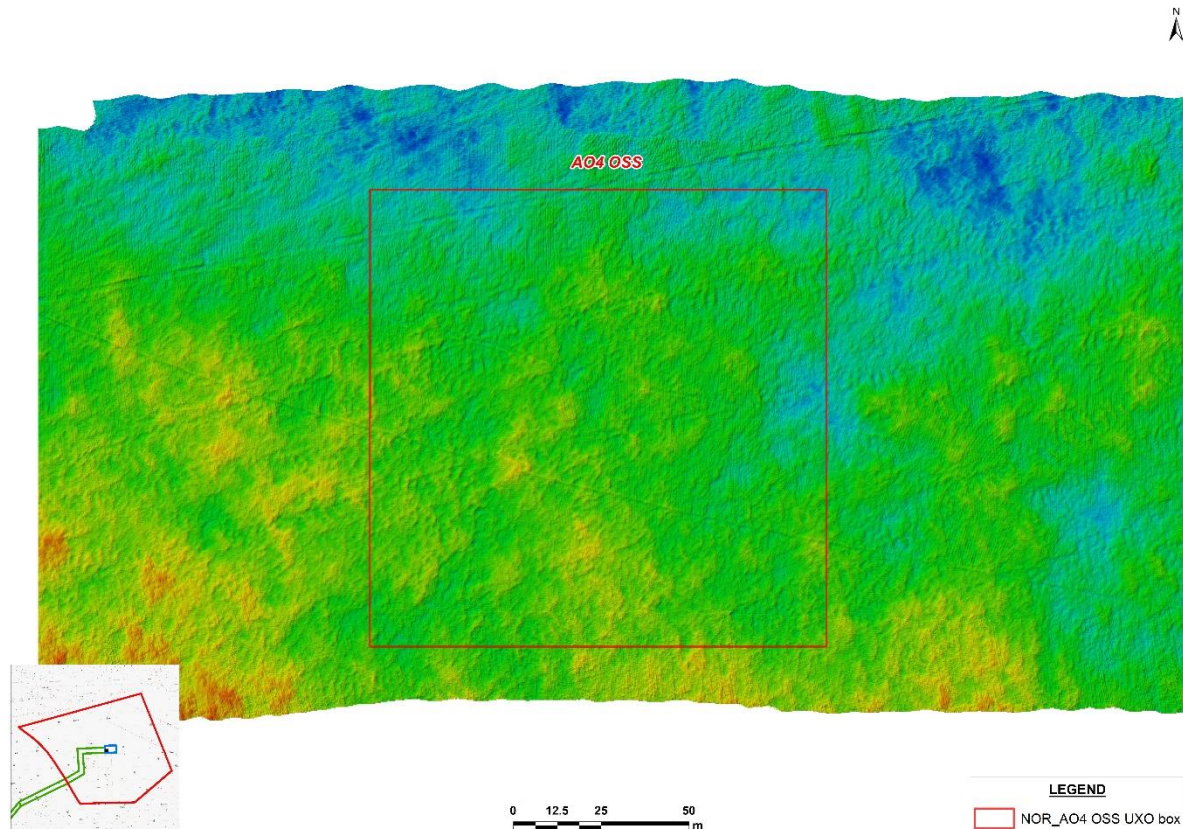

**Figure 3-5:** Example of the bathymetric data for NOR\_AO4 OSS.





### 3.3. SIDE SCAN SONAR – UXO SURVEY

The objective of this phase of data acquisition is the detection of possible sonar targets lying on the seabed. Due to the coverage requirements of gradiometer data acquisition, this required total coverage of the seabed within the UXO box, and hence a survey line spacing of 6 metres was utilised.

A side scan sonar system comprises a processing unit connected through a cable to a wet unit that transmits and receives acoustic energy. Side scan sonar can determine seabed morphology and configuration by means of acoustic signals. It can also determine its composition, identifying different seabed strata as hard (rocky or consolidated), soft or sedimentary, as well as identifying areas of seagrass.

<b>Confidentiality</b>	<i>Diffusion restreinte (restricted)</i>	<b>Pages</b>	<i>Page 22 of 48</i>
<b>Issue date</b>	28/11/2022	Document uncontrolled when printed/downloaded	



   	Project	Package	Issuer	Chrono	Revision	Status
	NOR_CM1	GPH - UXO	TEC	48	1.1_A	A
	Title	NOR_PeM_TEC_48_Results report - Geophysical-UXO survey - AO4 OSS area_1.1_A				

Side scan sonar systems can work in different frequency ranges: systems working in high frequencies, (between 500 kHz and 900kHz) offer higher resolution but lower ranges, with systems working in low frequencies (100 kHz), offer lower resolution but higher ranges. For this survey, a frequency of 900kHz was utilised. The reflection of the signal coming from the seabed is detected by the same transducers, amplified and transmitted to the control unit, and recorded and displayed on the computer screen, providing an acoustic map. With this data, it is possible to identify different seabed morphologies, together with the visualization of any seabed objects.

When the vessel is underway, the winch operator can start deploying cable until the fish gets to the desired working depth of about 6 m above the seabed.


The guidelines followed by Tecnoambiente during the surveying for SSS data acquisition are:


- IT-CM-01. SBL-SSS,1
- IT-CM-21. SSS Launch and Recovery, 0
- IT-CM-13. Geophysical Data Acquisition. General Procedure, 2
- IT-CM-14. Survey Basics Guidance, 0
- IT-CM-15. Online Surveying procedure, 3
- IT-CM-18. USBL Pole Deployment, 1

Once the SSS data were acquired and then exported into JSF format, the files are imported into the SonarWiz 7 software. Channels 3 and 4 were used for recording the high frequency data.

After data importation into the SonarWiz 7 software, an initial navigation correction was made for each imported file, applying smoothing filters to avoid errors in the heading of the tow fish. The track position was smoothed using a mean value of 300 pings.

<b>Confidentiality</b>	<i>Diffusion restreinte (restricted)</i>	<b>Pages</b>	<i>Page 23 of 48</i>
<b>Issue date</b>	28/11/2022	Document uncontrolled when printed/downloaded	


	Project	Package	Issuer	Chrono	Revision	Status
	NOR_CM1	GPH - UXO	TEC	48	1.1_A	A
	Title	NOR_PeM_TEC_48_Results report - Geophysical-UXO survey - AO4 OSS area_1.1_A				

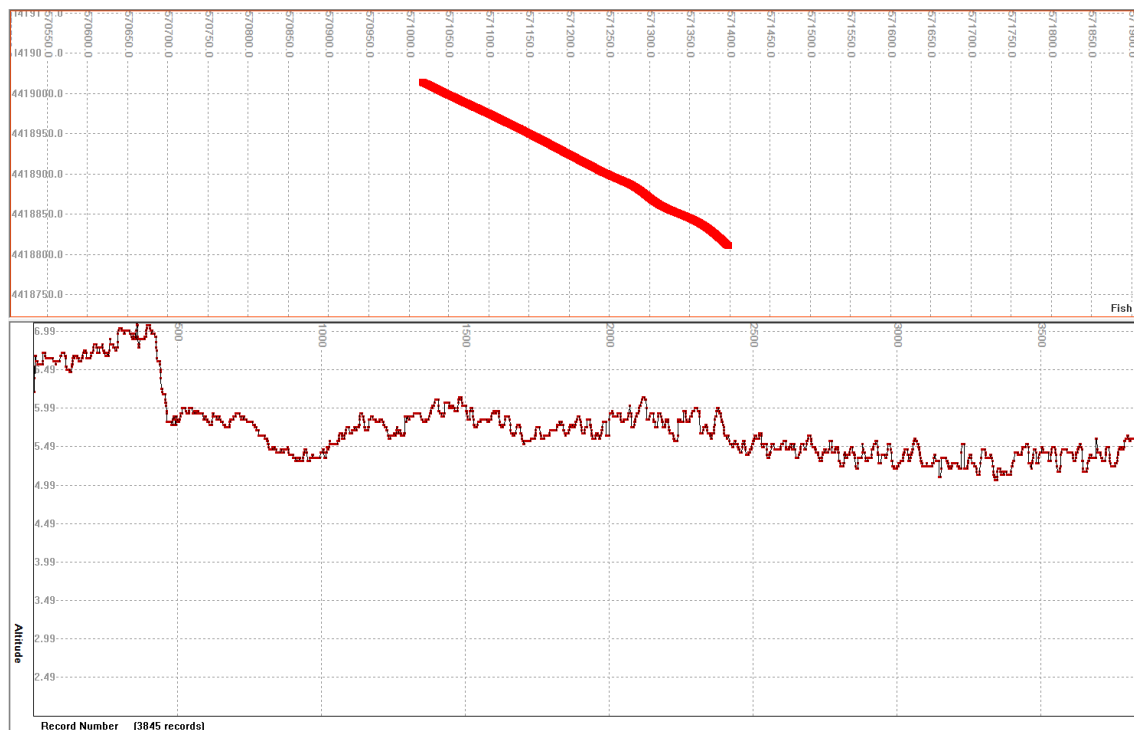


**Figure 3-6:** Navigation editor in SonarWiz 7.

After the aforementioned corrections were implemented, the water column for each file was eliminated, by applying the bottom-tracking acquired during the survey, as shown in Figure 3-7. If bottom-tracking of the tow fish failed during the survey, it was done automatically by applying filters or by drawing the seabed manually during post-processing. This enables slant range corrections for the digital data to be as accurate as possible.

<b>Confidentiality</b>	Diffusion restreinte (restricted)		<b>Pages</b>	Page 24 of 48
<b>Issue date</b>	28/11/2022	Document uncontrolled when printed/downloaded		

	Project	Package	Issuer	Chrono	Revision	Status
	NOR_CM1	GPH - UXO	TEC	48	1.1_A	A
	Title	NOR_PeM_TEC_48_Results report - Geophysical-UXO survey - AO4 OSS area_1.1_A				

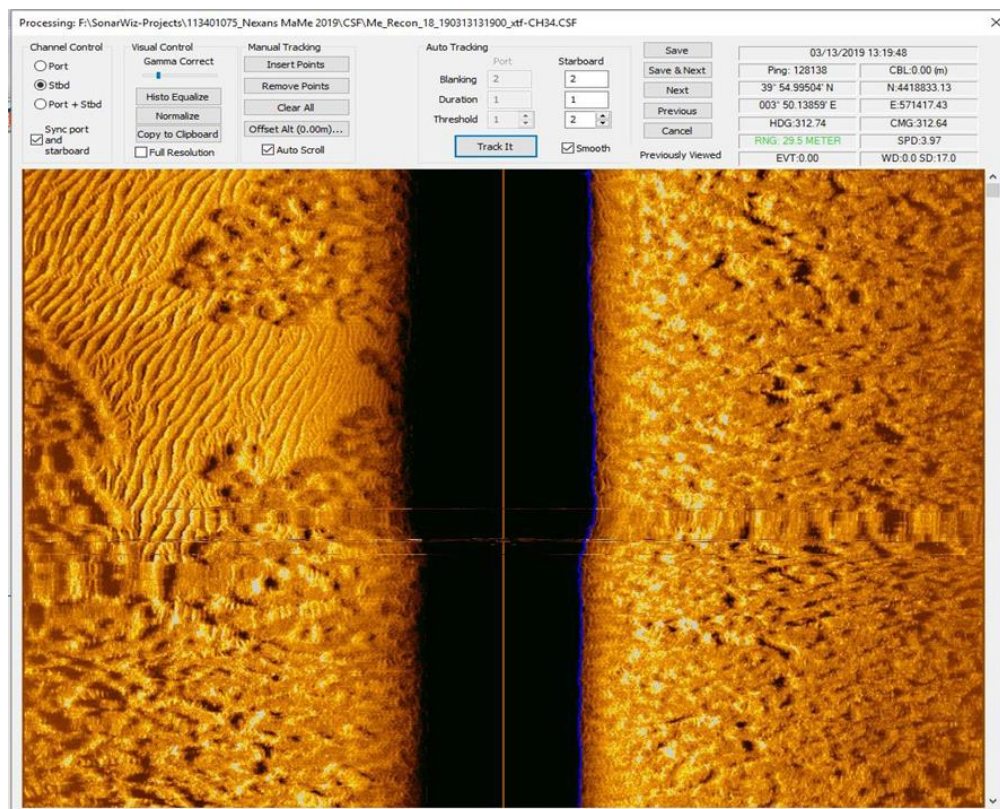

**Figure 3-7:** Bottom tracking processing drawn in blue in the SonarWiz software.


The following steps during SSS processing in the SonarWiz 7 software are the application and enabling of the EGN filter, and the enabling of the de-stripe filter.

At this point during data processing, a processed MBES geotiff is imported into the project. Using the MBES information, rotations to the SSS file are applied, in order to match feature orientations seen in the MBES data. Where necessary, a move offset can be applied to the SSS file, in order to match features within the MBES data.


Any observable contact within the area of interest is picked and its dimensions are measured.

The final processing step is the export of the sonar files into a GIS software package, where all of the information is integrated, and a sonar mosaic is generated. This is carried out by

<b>Confidentiality</b>	<i>Diffusion restreinte (restricted)</i>	<b>Pages</b>	<i>Page 25 of 48</i>
<b>Issue date</b>	28/11/2022	Document uncontrolled when printed/downloaded	

	Project	Package	Issuer	Chrono	Revision	Status
	NOR_CM1	GPH - UXO	TEC	48	1.1_A	A
	Title	NOR_PeM_TEC_48_Results report - Geophysical-UXO survey - AO4 OSS area_1.1_A				

converting the JSF files into 32bits RGB Geotiff images, to obtain georeferenced images of the processed data, with a resolution of 0.1 m.

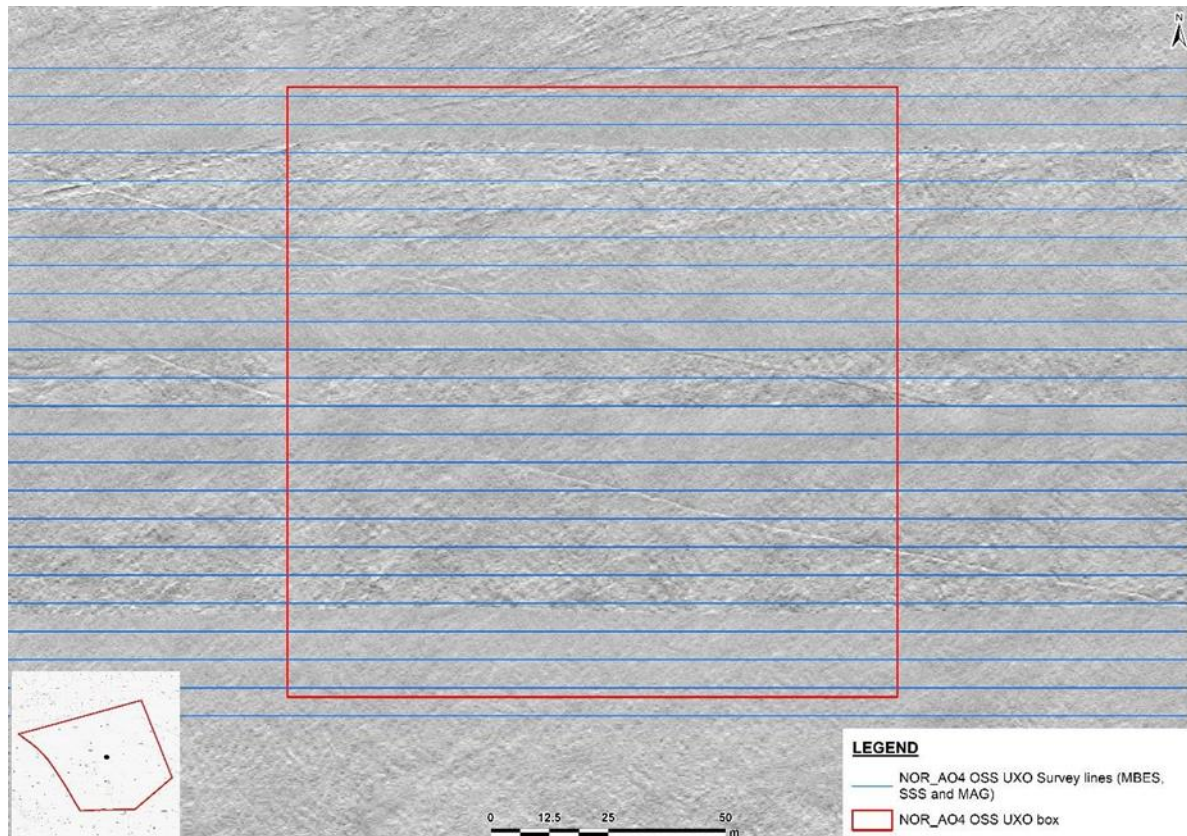


**Figure 3-8:** Example of the side scan sonar data for NOR\_AO4 OSS.

The guidelines followed by Tecnoambiente during the surveying for SSS data processing are:

- IT-CM-01. SBL-SSS,1
- IT-CM-27. SSS Processing procedure, 0


<b>Confidentiality</b>	<i>Diffusion restreinte (restricted)</i>	<b>Pages</b>	<i>Page 26 of 48</i>
<b>Issue date</b>	28/11/2022	Document uncontrolled when printed/downloaded	



	Project	Package	Issuer	Chrono	Revision	Status
	NOR_CM1	GPH - UXO	TEC	48	1.1_A	A
	Title	NOR_PeM_TEC_48_Results report - Geophysical-UXO survey - AO4 OSS area_1.1_A				

### 3.4. GRADIOMETER – UXO SURVEY

Magnetometer data were recorded using four Geometrics G-882 magnetometers fitted in a custom frame and spaced 1.1 metres apart, horizontally. Survey line spacing was set at 6 metres. The frame has an automated bottom tracking function, allowing it to keep a fixed height above the seabed. After merging in Qinsy, all raw data were timestamped, and output as TXT files were recorded for each magnetometer (Mag 1, Mag 2, Mag 3, and Mag 4).

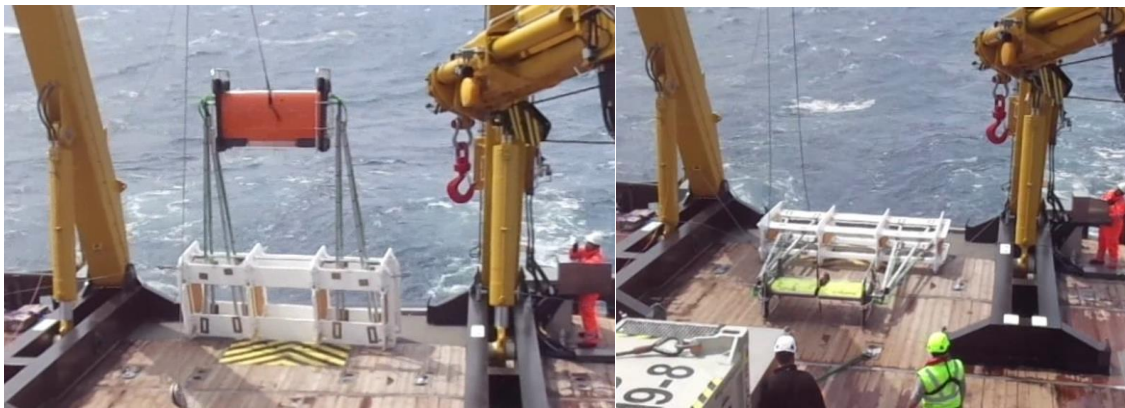

**Figure 3-9:** ROTV with the fixed frame system for MAG acquisition.





The guidelines followed by Tecnoambiente during the surveying for MAG-UXO data acquisition are:

- IT-CM-25. UXO Mooring Procedures, 0
- IT-CM-18. USBL Pole Deployment, 1
- IT-CM-26. UXO Scanfish Launch and Recovery, 0

Data was processed using UXO Marine Mag module from OASIS software.

Positioning and altitude data were corrected to eliminate outliers (despiked), then filtered, and smoothed. Incorrect positions were removed, and the positions were filtered using a non-linear filter. All altitudes greater than 4 m were removed from the database.

<b>Confidentiality</b>	<i>Diffusion restreinte (restricted)</i>	<b>Pages</b>	<i>Page 27 of 48</i>
<b>Issue date</b>	28/11/2022	Document uncontrolled when printed/downloaded	


   	Project	Package	Issuer	Chrono	Revision	Status
	NOR_CM1	GPH - UXO	TEC	48	1.1_A	A
	Title	NOR_PeM_TEC_48_Results report - Geophysical-UXO survey - AO4 OSS area_1.1_A				


The magnetometer data were corrected to eliminate aberrant values (“despiking”). They were also interpolated, but were also slightly smoothed, so as not to lose the weaker components of the signal.

The magnetometer values were then processed, in order to compensate for variations in the altitude of the fish (increase in the signal when the magnetometer approaches the seabed). The magnetometer values were recalculated at a constant virtual altitude of 3 m above the seabed. The altitudes were smoothed, using a B-Spline filter. Processed positions and altitudes were then exported, to calculate dynamic coverage.

Finally, the long-wavelength component of the Earth's magnetic field was calculated using several successive non-linear filters. This long wavelength component includes diurnal variations, geological variations, and noise, as well as the International Geomagnetic Reference Field (IGRF). This was then eliminated from the data set, resulting in a residual component, comprising primarily anthropogenic magnetic anomalies.

<b>Confidentiality</b>	<i>Diffusion restreinte (restricted)</i>	<b>Pages</b>	<i>Page 28 of 48</i>
<b>Issue date</b>	28/11/2022	Document uncontrolled when printed/downloaded	

	Project	Package	Issuer	Chrono	Revision	Status
	NOR_CM1	GPH - UXO	TEC	48	1.1_A	A
	Title	NOR_PeM_TEC_48_Results report - Geophysical-UXO survey - AO4 OSS area_1.1_A				

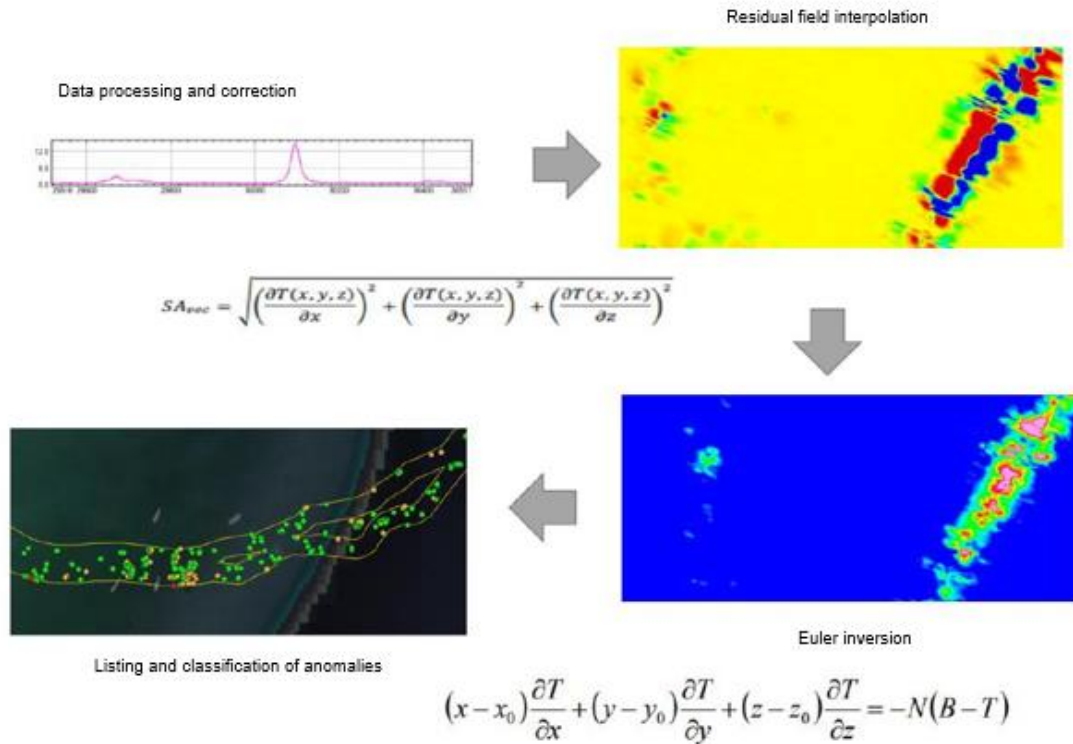


**Figure 3-10:** Processing workflow of magnetometer data.


A 2D map of the magnetic anomalies within the survey area was produced by interpolating these data, using a 0.25 m grid and 5 m blanking distance. The amplitude of the analytic signal was calculated using a 3D grid. The analytic signal is utilized for the mapping of structures and for the more precise positioning of any targets.

The results of the magnetometric measurements are included as two maps:

- A map of the residual magnetic field (in nT)
- A map of the analytical signal (in nT/m)

<b>Confidentiality</b>	Diffusion restreinte (restricted)	<b>Pages</b>	Page 29 of 48
<b>Issue date</b>	28/11/2022	Document uncontrolled when printed/downloaded	

	Project	Package	Issuer	Chrono	Revision	Status
	NOR_CM1	GPH - UXO	TEC	48	1.1_A	A
	Title	NOR_PeM_TEC_48_Results report - Geophysical-UXO survey - AO4 OSS area_1.1_A				

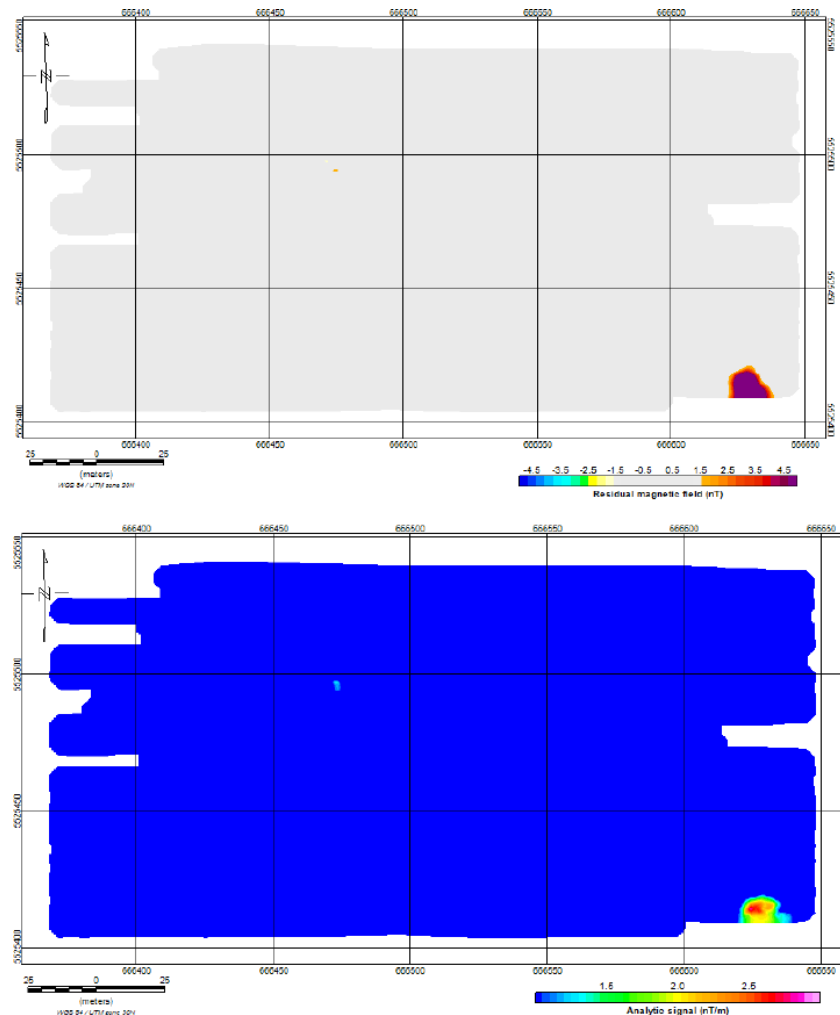





**Figure 3-11:** Example of the maps of the residual field and the analytic signal for NOR\_AO4 OSS.

The magnetometer coverage depended on the spacing width of the surveyed lines and the height above seabed of the measuring device, making it possible to ensure the detection of an object at any point, by knowing the distance between the measuring sensor and the object. The requirements of the Scope of Work were met throughout the surveyed areas, i.e. detection of a 25 kg ferrous mass at a depth of 2 m and a maximum detection distance of 6 m (*Penella 1982*).

<b>Confidentiality</b>	<i>Diffusion restreinte (restricted)</i>	<b>Pages</b>	<i>Page 30 of 48</i>
<b>Issue date</b>	28/11/2022	Document uncontrolled when printed/downloaded	



   	Project	Package	Issuer	Chrono	Revision	Status
	NOR_CM1	GPH - UXO	TEC	48	1.1_A	A
	Title	NOR_PeM_TEC_48_Results report - Geophysical-UXO survey - AO4 OSS area_1.1_A				

The dynamic coverage was calculated for a detection range ( $\Delta$ ) determined by the mass of the smallest object we were looking for and the depth below seabed of the soil intrusive activity.

The detection radius (d) under sensor was then calculated for each point with the formula:

$$d = \sqrt{\Delta^2 - (alt + DBSF)^2}$$

Where:

$\Delta$  = Detection range


DBSF= Depth below seafloor


alt= Altitude of sensor

For the detection range of 6 m and depth of 2 m defined for this survey, the formula is defined as follows:

$$d = \sqrt{6^2 - (alt + 2)^2}$$

<b>Confidentiality</b>	<i>Diffusion restreinte (restricted)</i>	<b>Pages</b>	<i>Page 31 of 48</i>
<b>Issue date</b>	28/11/2022	Document uncontrolled when printed/downloaded	


	Project	Package	Issuer	Chrono	Revision	Status
	NOR_CM1	GPH - UXO	TEC	48	1.1_A	A
	Title	NOR_PeM_TEC_48_Results report - Geophysical-UXO survey - AO4 OSS area_1.1_A				

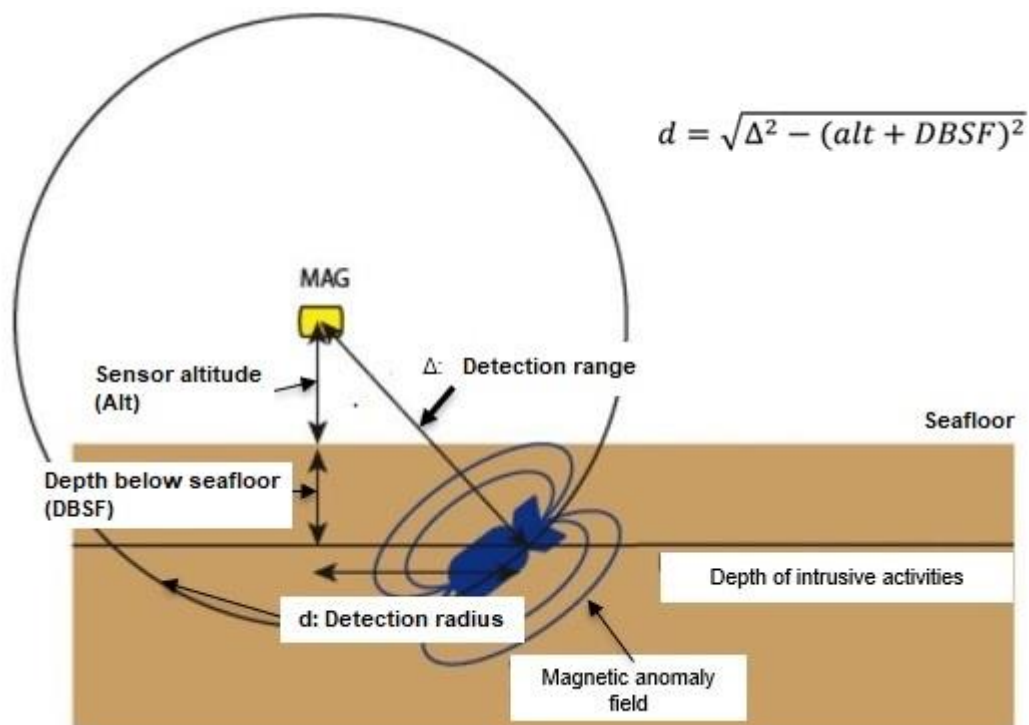

**Figure 3-12:** Dynamic coverage calculations.

This means that for each point of data, a circle of detection with radius  $d$  is drawn around this point. The data were opened within a GIS software package (QGIS). Drawing these circles in the GIS software, using a buffer of detection ranges, enables us to map the detection coverage and identify any data gaps.

<b>Confidentiality</b>	<i>Diffusion restreinte (restricted)</i>	<b>Pages</b>	<i>Page 32 of 48</i>
<b>Issue date</b>	28/11/2022	Document uncontrolled when printed/downloaded	

	Project	Package	Issuer	Chrono	Revision	Status
	NOR_CM1	GPH - UXO	TEC	48	1.1_A	A
	Title	NOR_PeM_TEC_48_Results report - Geophysical-UXO survey - AO4 OSS area_1.1_A				

## 4. RESULTS

### 4.1. COVERAGE AREA

The survey took place over the OSS GI box for a magnetometer coverage of 37,055 m<sup>2</sup>.


**Table 6:** Magnetometer coverage area (centroid of the GI box).

BOX	MAGNETOMETER SURVEY AREA WITH 100% DYNAMIC COVERAGE (m2)
AO4_OSS	37,055

### 4.2. ANOMALY PICKING





#### 4.2.1. Magnetic anomalies

Visualization of the residual field map (in nT) makes it possible to locate any dipole anomalies present. The map analysis threshold (sensitivity of the display via the adjustment of the colour scale) is very important to validate the interpretation. By gradually decreasing the analysis threshold, it is possible to image anomalies of lower intensity. After analysis of the data, anomalies were manually picked, using the colour scale presented in Figure 4-1.



**Figure 4-1:** Colour scale and threshold used for analysis of magnetic anomalies.

<b>Confidentiality</b>	<i>Diffusion restreinte (restricted)</i>	<b>Pages</b>	<i>Page 33 of 48</i>
<b>Issue date</b>	28/11/2022	Document uncontrolled when printed/downloaded	

   	Project	Package	Issuer	Chrono	Revision	Status
	NOR_CM1	GPH - UXO	TEC	48	1.1_A	A
	Title	NOR_PeM_TEC_48_Results report - Geophysical-UXO survey - AO4 OSS area_1.1_A				

Anomalies are also detected automatically from the analytical signal grid with a 1.0 nT/m threshold (grid value cut-off of 1nT/m). Two (2) magnetic anomalies were detected within the OSS survey area (listings are provided in Appendix I).

#### 4.2.2. MBES and side scan sonar contacts

MBES and sidescan sonar anomalies were picked only in the 15 m vicinity of the original GI OSS box location or the alternative GI Box location. None sidescan sonar contacts were detected and two (2) bathymetric contacts were detected in the dataset (Listings in Appendix II and III).

### 4.3. DISCRIMINATION OF pUXO TARGETS

Magnetic anomalies indicate the presence of ferrous elements at or below the seabed. This is true for most types of unexploded ordnance (UXO), with the exception of the aluminium LMB.


**Any magnetic anomaly can therefore correspond to a potential UXO**

The historical study shows a proven risk of LMA/LMB for the AO4 region. These objects are weakly magnetic and can be considered as the equivalent of a 10 kg iron weight. This is the reason that this weight of ferrous mass was considered, during the preparation of the SIT. Consequently, the LMA/LMB risk is currently taken into account at seabed level, both by magnetometer detectability (about 13nT) and by the analysis of side scan sonar and MBES images.

Therefore:

- Any side scan sonar and MBES contact with a magnetic signature are considered as pUXO.

<b>Confidentiality</b>	<i>Diffusion restreinte (restricted)</i>	<b>Pages</b>	<i>Page 34 of 48</i>
<b>Issue date</b>	28/11/2022	Document uncontrolled when printed/downloaded	


	Project	Package	Issuer	Chrono	Revision	Status
	NOR_CM1	GPH - UXO	TEC	48	1.1_A	A
	Title	NOR_PeM_TEC_48_Results report - Geophysical-UXO survey - AO4 OSS area_1.1_A				

- Shape and length of side scan sonar and MBES data were analysed carefully for discrimination as non-UXO.
- Side scan sonar and MBES contacts without magnetic signatures and without any corresponding shape and length criteria are considered as non-UXO. But as these contacts correspond to potential obstructions on the seabed, they were mapped without any avoidance area indicated on the ALARP certificate maps.

## 5. AVOIDANCE DISTANCES


Following the analysis, we are looking for as low as reasonably practicable (ALARP), areas that can be considered clear of any pUXO. The avoidance criteria have been defined following the UXO threat and risk assessment with geotechnical investigation risk mitigation strategy recognised and desktop studies (**Ref. 01**):

Thus, the avoidance distance can be calculated as follows (Figure 5-1):

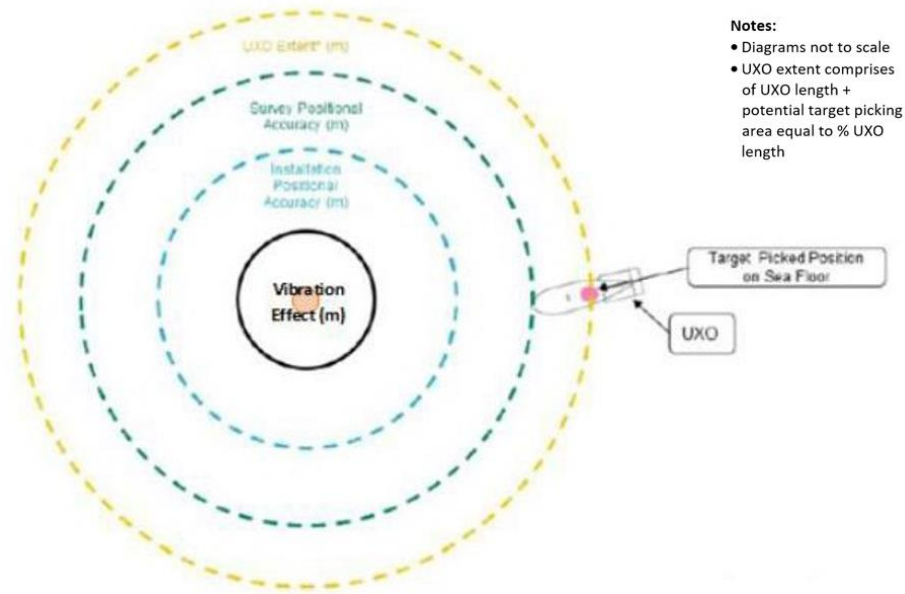

**Figure 5-1:** Avoidance distances.

<b>Confidentiality</b>	Diffusion restreinte (restricted)	<b>Pages</b>	Page 35 of 48
<b>Issue date</b>	28/11/2022	Document uncontrolled when printed/downloaded	

	Project	Package	Issuer	Chrono	Revision	Status
	NOR_CM1	GPH - UXO	TEC	48	1.1_A	A
	Title	NOR_PeM_TEC_48_Results report - Geophysical-UXO survey - AO4 OSS area_1.1_A				

*Avoidance distance = Geotechnical tool width + Vibration effect distance + Geotechnical tool positioning accuracy + UXO survey accuracy + Ammunition length*

The effect of the generation of seismic waves during vibro-driving or pile driving has to be considered in the case of geotechnical drilling or pile driving. These machines generate a wide variety of seismic waves (pressure, Rayleigh, shear) (Study report DRS17-164706-11171B, INERIS) that can trigger UXO detonation. This effect need not be considered for other geotechnical work, such as jack up or anchor installation.

For the OSS area, the 15 m buffer was applied as an avoidance distance, in accordance with the document delivered by 6 Alpha Associates Limited (Ref. 01).

**A safety buffer of 15m is to be employed from any isolated magnetic anomaly.**





This was achieved through geospatial processing by QGIS software.


Firstly, the areas that could not be considered as clear of any pUXO are mapped, grouping the pUXO targets (magnetic anomalies and/or sonar and MBES contacts) and potential saturated areas. Afterwards, the “avoidance areas” were mapped with an avoidance zone of 15 metres (a 15 m safety buffer around the anomaly) away from all the potential UXO (pUXO) anomalies, or any saturated or excluded areas. This avoidance area was also applied from the edge of the dataset inwards, towards the centre of the survey area.

The free space between these avoidance areas and the detection surface and the survey limits was then mapped, and a workable area was obtained. This defined the outline of the ALARP certificate (Figure 5-2).


When no ALARP zone was identified (Figure 5-3), an alternative location for the GI box was proposed.

<b>Confidentiality</b>	<i>Diffusion restreinte (restricted)</i>	<b>Pages</b>	<i>Page 36 of 48</i>
<b>Issue date</b>	28/11/2022	Document uncontrolled when printed/downloaded	

 Le réseau de transport d'électricité  MINISTÈRE DE LA TRANSITION ÉNERGÉTIQUE  TECNOAMBIENTE  GEOQUIP	Project	Package	Issuer	Chrono	Revision	Status
	NOR_CM1	GPH - UXO	TEC	48	1.1_A	A
	Title	NOR_PeM_TEC_48_Results report - Geophysical-UXO survey - AO4 OSS area_1.1_A				

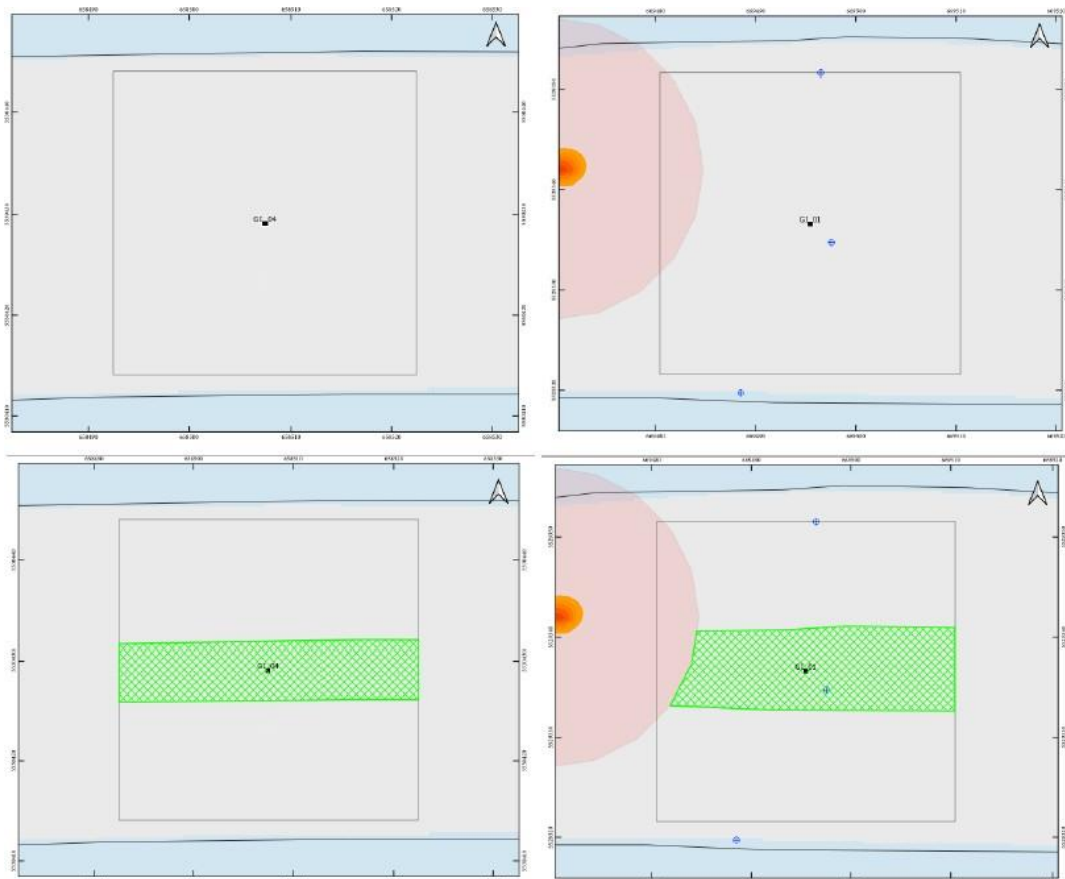





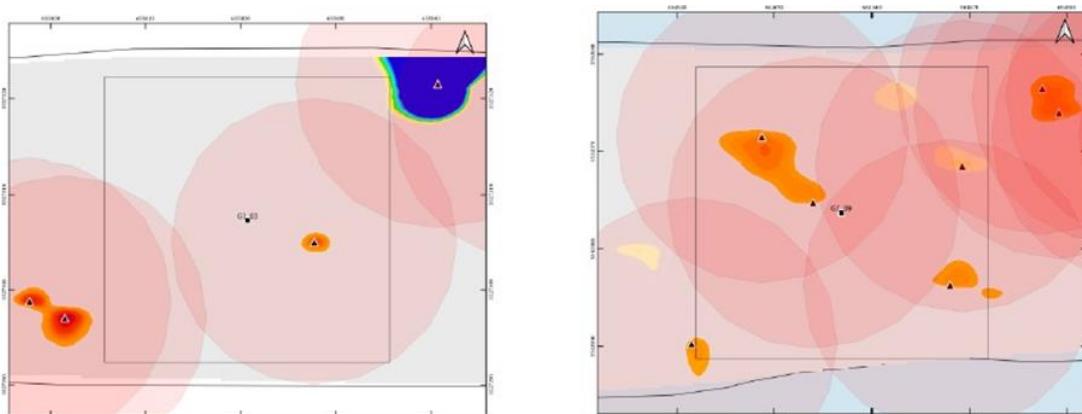




**Figure 5-2:** Case where the GI boxes location is not impacted or little impacted by avoidance areas: an ALARP zone is defined (in green).



**Figure 5-3:** Case where the GI boxes location is largely or completely impacted by avoidance areas and no ALARP zone can be defined.

Confidentiality	Diffusion restreinte (restricted)		Pages	Page 37 of 48
Issue date	28/11/2022	Document uncontrolled when printed/downloaded		

	Project	Package	Issuer	Chrono	Revision	Status
	NOR_CM1	GPH - UXO	TEC	48	1.1_A	A
	Title	NOR_PeM_TEC_48_Results report - Geophysical-UXO survey - AO4 OSS area_1.1_A				

Concession	Seismic lines
 AO4_Concession area	 AO4_Planned UHR Lines
Geotech locations	 AO4_pUXO magnetic target
 AO4_GI_Location_Box_100x100m	 AO4_Mag_avoidance_area_buffer
 AO4_GI_Location_original	 AO4_MBES Contact
	 AO4_SSS Contact

**Figure 5-4:** Legend of the ALARP maps.

## 6. CONCLUSION

ALARP areas totalling 14,208 m<sup>2</sup> were identified for the OSS GI box (Table 7). During data acquisition and processing in the OSS surveyed area, possible UXO (pUXO) was identified.





This has resulted in the moving of the substation from its original position to a magnetically quiet area (represented in grey colour in the following table).

**Table 7:** Final ALARP workable areas and GI box location.

ID	Name GI	Easting UTM30N	Northing UTM30N	Workable area (m <sup>2</sup> )
1	OSS	666543.45	5525472.59	10000

<b>Confidentiality</b>	Diffusion restreinte (restricted)	<b>Pages</b>	Page 38 of 48
<b>Issue date</b>	28/11/2022	Document uncontrolled when printed/downloaded	



   	Project	Package	Issuer	Chrono	Revision	Status
	NOR_CM1	GPH - UXO	TEC	48	1.1_A	A
	Title	NOR_PeM_TEC_48_Results report - Geophysical-UXO survey - AO4 OSS area_1.1_A				

## REFERENCES

In accordance with:

- Letter the “Inspection des poudres et explosifs” of the French Ministry of Defence and the “Direction générale du Travail” of the French Ministry of Labour of September 18th, 2013, relating to pyrotechnic clearance carried out on civil land.
- Decree No. 2014-381 of March 28, 2014, regulatory part Art. R.733-1 to 16 and legislative part Art. L. 733-1 to 3.

In reference to:

- Decree No. 2005-1325 of October 26, 2005, amended from the Ministry of Defence relating to the safety rules applicable during work in the context of a pyrotechnic clearance site and the two implementing decrees.

**Ref.01.** Unexploded Ordnance Threat and Risk Assessment with Geotechnical Investigation Risk Mitigation Strategy:  
8492\_1\_A04 Normandy\_DNGVL\_UXO\_TARA\_with\_RMS\_Client Draft\_V3.0

**Ref.02.** Project AO4 De-risk Surveys Scope Of Work: SOS-01 - Scope Of Service AO4





**Ref.03.** Employer’s Requirements Marine Operations: SVY-ERS-03 – Survey Specification

**Ref.04.** Specification for UXO Survey Verification Test RTE Export Cables: ERS-03-A –SVT Specification

**Ref.05.** UXO Surrogate Items report: SIT report – AO4 and A05 geophysical and UXO survey.

**Ref.06.** NOR\_AO4 Area - Seismic, geophysical and UXO survey - Mobilization Report: NOR\_TEC\_21\_Mob report - AO4 survey area\_ 0.2

<b>Confidentiality</b>	<i>Diffusion restreinte (restricted)</i>	<b>Pages</b>	<i>Page 39 of 48</i>
<b>Issue date</b>	28/11/2022	Document uncontrolled when printed/downloaded	

   	Project	Package	Issuer	Chrono	Revision	Status
	NOR_CM1	GPH - UXO	TEC	48	1.1_A	A
	Title	NOR_PeM_TEC_48_Results report - Geophysical-UXO survey - AO4 OSS area_1.1_A				

### Ref.07. NOR-AO4-UXO survey -Operational Report





Pennella 1982 Magnetometer techniques in the detection of projectiles Final Report, TR239,

Naval explosive ordnance technology center

Rapport d'étude DRS 17-164706-11171-B, Impact des vibrations sur la stabilité





descarrières souterraines, INERIS, 2017.

<b>Confidentiality</b>	<i>Diffusion restreinte (restricted)</i>	<b>Pages</b>	<i>Page 40 of 48</i>
<b>Issue date</b>	28/11/2022	Document uncontrolled when printed/downloaded	

   	Project	Package	Issuer	Chrono	Revision	Status
	NOR_CM1	GPH - UXO	TEC	48	1.1_A	A
	Title	NOR_PeM_TEC_48_Results report - Geophysical-UXO survey - AO4 OSS area_1.1_A				





## APPENDIX I – LIST OF THE MAGNETIC ANOMALIES DETECTED

<b>Confidentiality</b>	<i>Diffusion restreinte (restricted)</i>	<b>Pages</b>	<i>Page 41 of 48</i>
<b>Issue date</b>	28/11/2022	Document uncontrolled when printed/downloaded	

   	Project	Package	Issuer	Chrono	Revision	Status
	NOR_CM1	GPH - UXO	TEC	48	1.1_A	A
	Title	NOR_PeM_TEC_48_Results report - Geophysical-UXO survey - AO4 OSS area_1.1_A				





Nb	TARGET_ID	X (m)	Y (m)	SA (nT/m)	Box	STATUS
1	AO4_OSS_2	666626.75	5525414.25	2.60	AO4_OSS	pUXO
2	AO4_OSS_5	666472.75	5525497.00	1.27	AO4_OSS	pUXO

Confidentiality	Diffusion restreinte (restricted)		Pages	Page 42 of 48
Issue date	28/11/2022	Document uncontrolled when printed/downloaded		

   	Project	Package	Issuer	Chrono	Revision	Status
	NOR_CM1	GPH - UXO	TEC	48	1.1_A	A
	Title	NOR_PeM_TEC_48_Results report - Geophysical-UXO survey - AO4 OSS area_1.1_A				





## APPENDIX II – LIST OF THE SIDE SCAN CONTACTS DETECTED

<b>Confidentiality</b>	<i>Diffusion restreinte (restricted)</i>	<b>Pages</b>	<i>Page 43 of 48</i>
<b>Issue date</b>	28/11/2022	Document uncontrolled when printed/downloaded	

   	Project	Package	Issuer	Chrono	Revision	Status
	NOR_CM1	GPH - UXO	TEC	48	1.1_A	A
	Title	NOR_PeM_TEC_48_Results report - Geophysical-UXO survey - AO4 OSS area_1.1_A				

None. Intentionally left blank





<b>Confidentiality</b>	<i>Diffusion restreinte (restricted)</i>	<b>Pages</b>	<i>Page 44 of 48</i>
<b>Issue date</b>	28/11/2022	Document uncontrolled when printed/downloaded	

   	Project	Package	Issuer	Chrono	Revision	Status
	NOR_CM1	GPH - UXO	TEC	48	1.1_A	A
	Title	NOR_PeM_TEC_48_Results report - Geophysical-UXO survey - AO4 OSS area_1.1_A				

### APPENDIX III – LIST OF THE MBES CONTACTS DETECTED





<b>Confidentiality</b>	<i>Diffusion restreinte (restricted)</i>	<b>Pages</b>	<i>Page 45 of 48</i>
<b>Issue date</b>	28/11/2022	Document uncontrolled when printed/downloaded	



   	Project	Package	Issuer	Chrono	Revision	Status
	NOR_CM1	GPH - UXO	TEC	48	1.1_A	A
	Title	NOR_PeM_TEC_48_Results report - Geophysical-UXO survey - AO4 OSS area_1.1_A				


TARGET_ID	X (m)	Y (m)	STATUS
17	666540.99	5525416.32	non UXO

Confidentiality	Diffusion restreinte (restricted)	Pages	Page 46 of 48
Issue date	28/11/2022	Document uncontrolled when printed/downloaded	

   	Project	Package	Issuer	Chrono	Revision	Status
	NOR_CM1	GPH - UXO	TEC	48	1.1_A	A
	Title	NOR_PeM_TEC_48_Results report - Geophysical-UXO survey - AO4 OSS area_1.1_A				

## APPENDIX IV – ALARP CERTIFICATE MAP

<b>Confidentiality</b>	<i>Diffusion restreinte (restricted)</i>	<b>Pages</b>	<i>Page 47 of 48</i>
<b>Issue date</b>	28/11/2022	Document uncontrolled when printed/downloaded	

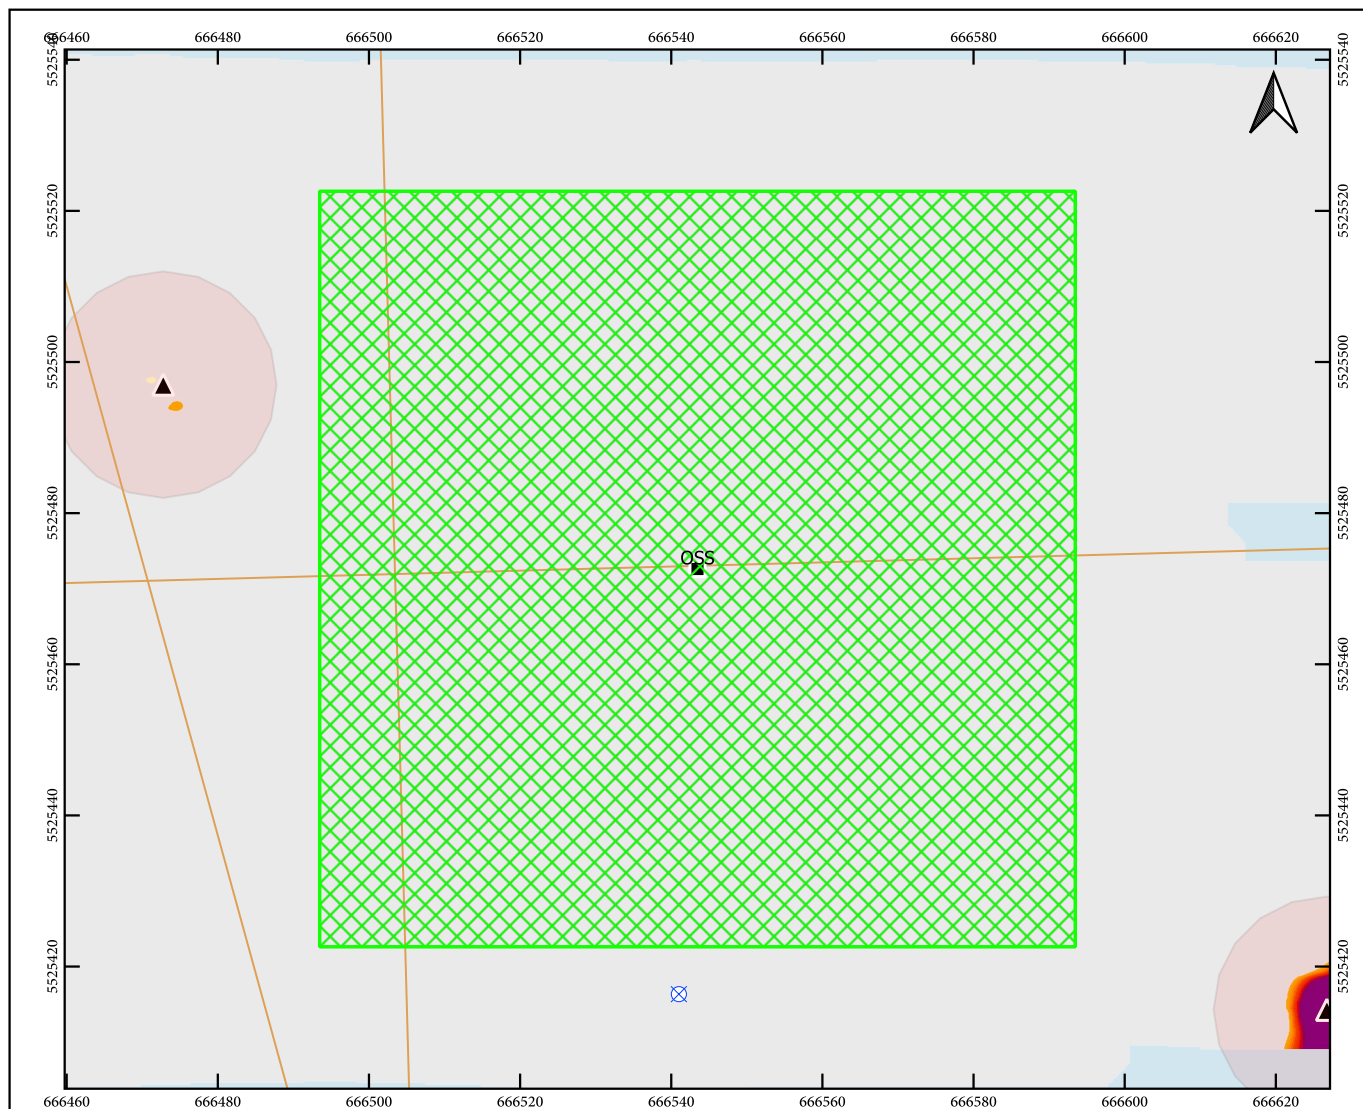

#### Concession

AO4\_Concession area

#### Geotech locations

AO4\_GI\_Location\_Box\_100x100m

AO4\_GI\_Location\_original

#### Seismic lines

AO4\_Planned UHR Lines

AO4\_pUXO magnetic target

AO4\_Mag\_avoidance\_area\_buffer


AO4\_MBES Contact

AO4\_SSS Contact

#### ALTERNATIVE LOCATION

ALARP Working area : 10000 square meters

ALARP\_Working area



Residual total magnetic field (nT)



#### ANNEXE A: AO4 - OSS ALARP CERTIFICATE GIS

Scale: 1/1000

Date: 2021-11-27

Geodesy : WGS 84 - UTM 30N

Version: V0

